


# 3CCT & 3WATT TUNABLE T8 SERIES

(UL Type B) Internal Driver Line Voltage Lamps

## DESCRIPTION

- Aluminum housing, no glass, no Fragile
- 3 color temperature tunable
- 3 power wattage tunable
- ETL, DLC5.1, CE, ROHS certifications
- Five-year-warranty after-sales service

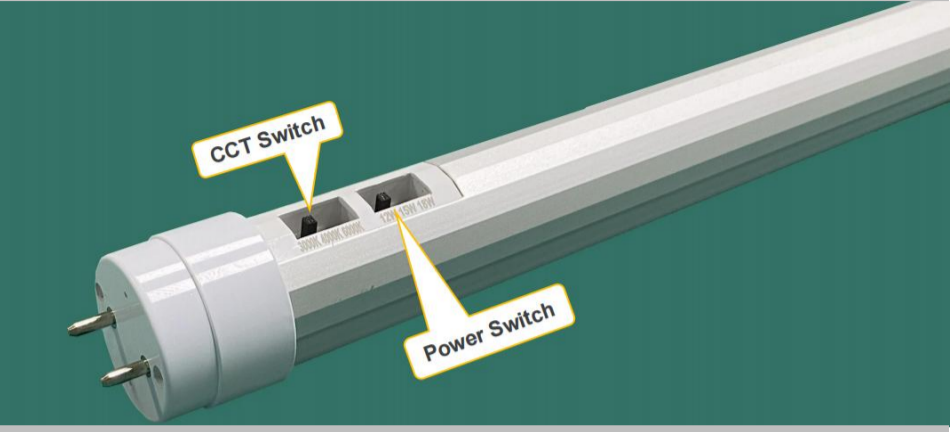


## TECHNICAL DATA

<b>TUBE SIZE</b>	4 Foot	<b>TUBE CONSTRUCTION</b>	AL+PC
<b>3 WATTS</b>	12W-15W-18W	<b>LED DRIVER</b>	Internal
<b>3 COLORS</b>	3000K-4000K-5000K	<b>OPTIONAL LENS</b>	Frosted / Clear
<b>LIGHT EFFICACY</b>	150lm/w	<b>BEAM ANGLE</b>	120°
<b>LIGHT LUMEN</b>	1800lm(12W)-2250lm(15W)-2700lm(18W)	<b>INPUT VOLTAGE</b>	AC100-277V
<b>INSTALLATION</b>	Bypass Ballast(Direct Wire)	<b>POWER FACTOR</b>	>90
<b>WIRING CONNECTION</b>	Double-End-Power	<b>CRI</b>	>80
<b>LAMP HOLDER</b>	Medium Bi-Pin (G13)	<b>DIMMABLE</b>	No

## SPECIFICATION


MODEL	LENGTH	3CCT TUNABLE	3WATT TUNABLE	EFFICACY	LUMEN	INPUT VOLT
JL-ALT8-4FTB-ZZW-CCT	4 Foot (120CM)	3000K-4000K-5000K or 3000K-4000K-6000K	12W-15W-18W	150lm/w	1350lm(12W) 2250lm(15W) 2700lm(18W)	AC100-277V

## DIMENSION

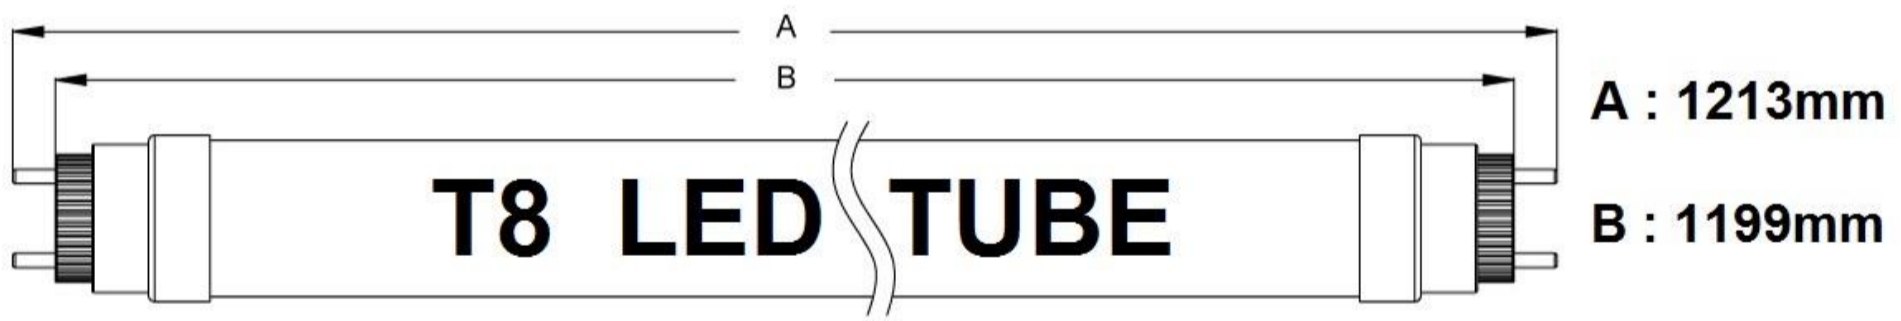

## INSTALLATION (CALL ELECTRICIAN FOR RETROFIT SERVICE)

- 1) Turn off the power to the light fixture before installation
- 2) Open the diffuser from the light fixture
- 3) Remove the fluorescent tubes and ballast
- 4) Connect line L and N to **Shunted** sockets like right diagram
- 5) Plug LED tube into lamp holders and close the diffuser
- 6) Turn on the power and check the light distribution angle

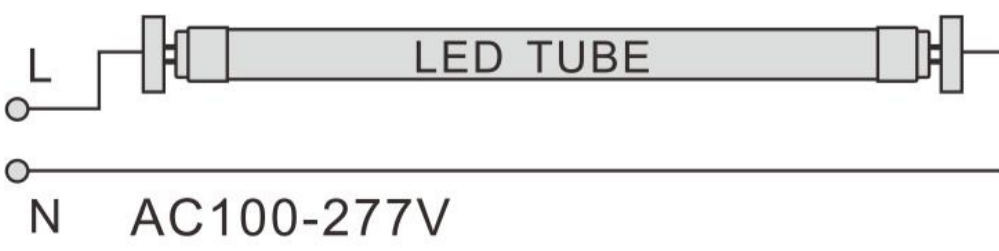

# Double-End-Power