




---

# CWP04 Wall Packs

## Installation Instructions

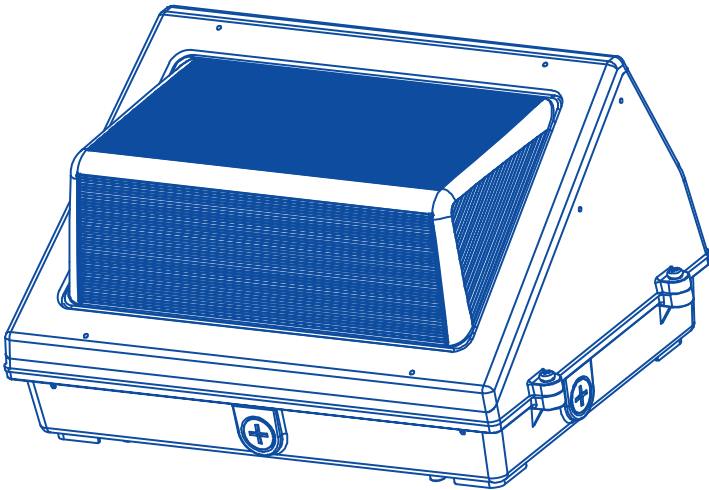

**WARNING:** Ensure power is off before installation, wiring, or performing any maintenance on the fixture

## CAUTION

- Read all instructions carefully before installing or performing any maintenance on the fixture(s).
- This fixture must be installed in accordance with all applicable local codes.
- Proper grounding is required to ensure personal safety. Carefully observe the correct grounding procedure under the installation section.
- Ensure power is off prior to performing any maintenance.
- Check that voltage is compatible with fixture driver. Only use approved connectors for all electrical connections.
- Do not expose the fixture to water during installation.

## JUNCTION BOX INSTALLATION

Black: Line 1 White: Neutral Yellow/Green: Ground

**WARNING:** Ensure all fixture ground wires are connected to the ground of the incoming power supply

1. Turn off the power.
2. Use a screwdriver to remove the screws on both sides of the front cover. (Fig.1)
3. Open the fixture and disconnect the connection terminals, then remove the front cover of the fixtures. (Fig. 2)
4. Use a screwdriver to remove the plug.
5. Use an electric drill to drill through the mounting hole on the fixture. (Fig. 3)
6. Attach foam gasket to fixture base (between fixture and J-box/wall) (Fig. 4)
7. Thread the wire through the bottom mounting hole. (Fig. 5)
8. Use screws to secure the bottom shell on the mounting seat. (Fig. 6)

9. Connect Line 1, Neutral and D wires to the power supply. (Fig. 7)
10. Install the cover of the fixture and connect the terminal block. (Fig. 8)

11. Secure the front cover with screws.
12. Make sure all installation steps are completed prior to turning the power on.




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6




Fig. 7




Fig. 8

## DIRECT WALL MOUNT INSTALLATION

Black: Line 1 White: Neutral Yellow/Green: Ground

**WARNING:** Ensure all fixture ground wires are connected to the ground of the incoming power supply

1. Turn off the power.
2. Use a screwdriver to remove the screws on both sides of the front cover. (Fig. 9)
3. Open the fixture and disconnect the connection terminals, and remove the upper cover of the fixtures. (Fig. 10)
4. Drill through the 4 mounting holes on the fixture using an electric drill. (Fig. 11)
5. Drill holes in the wall that line up with the mounting holes on the fixture. (Fig. 12)
6. Insert the rubber expansion plugs into the 4 holes in the wall. (Fig. 13)
7. Remove threaded plug and attach foam gasket between fixture and wall. (Fig. 14)
8. Secure the fixture to the wall by inserting screws through the mounting holes, into the expansion wall plugs. (Fig.15)
9. Through the top terminal, connect the wire tube through the side hole to the L, N, and G wires on the power supply. (Fig. 16)
10. Place the front cover on the fixture and connect the terminal line. (Fig. 17)
11. Secure the front cover with screws.
12. Make sure all installation steps are completed prior to turning the power on.




Fig. 9

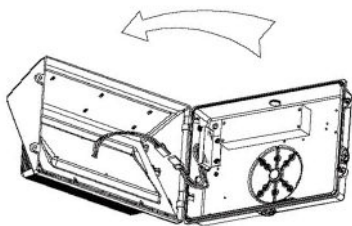


Fig. 10




Fig. 11

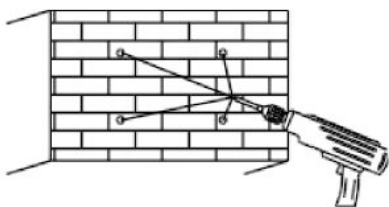


Fig. 12




Fig. 13

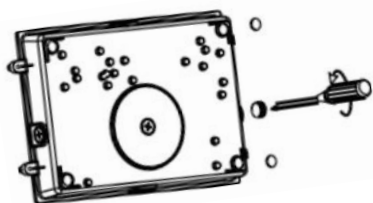


Fig. 14




Fig. 15




Fig. 16


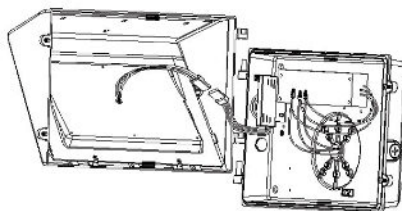


Fig. 17

## DIP SWITCH INSTRUCTIONS

**IMPORTANT:** Turn off the power before adjusting colour temperature


1. The colour temperature is 3000K when the DIP switch is in the left position.
2. The colour temperature is 4000K when the DIP switch is in the center position.
3. The colour temperature is 5000K when the DIP switch is in the right position.

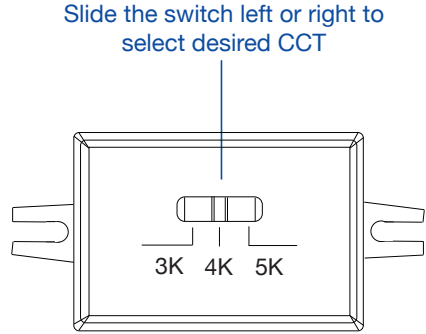

## PHOTOCELL INSTRUCTIONS

**IMPORTANT:** Turn off the power before adjusting photocell settings

1. Photocell is ON when the DIP switch is in the top (ON).
2. Photocell is OFF when DIP switch is in the bottom (OFF) position.

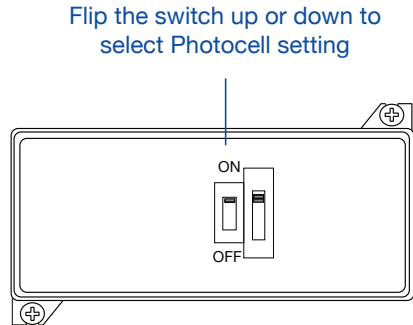

Questions or Concerns? We are happy to help!

Email Us: [info@csc-led.com](mailto:info@csc-led.com)

Call Us: 1-888-900-9885