

Encastré 1 LED Gimbal en retrait


4 "rond



Principales caractéristiques

Cardan de régression encastré à DEL fiat rond de 4 "avec driver intégré dans la boîte de connexion
 Modèle à globe oculaire, rond régressé et carré régressé Type IC - aucun boîtier requis
 Un seul CCT ou plusieurs CCT sont disponibles
 Flexibilité pour changer la température de couleur pendant l'installation en fonction d'une application spécifique, il suffit d'ajuster la température de couleur avec l'interrupteur à glissière situé sur le luminaire
 Performances et durée de vie supérieures des LED
 Inclinaison à 30 °, rotation à 360 °
 Découpez le trou dans le plafond et enclenchez le dispositif dans l'ouverture avec les clips à ressort
 Construction en aluminium

Dimensions

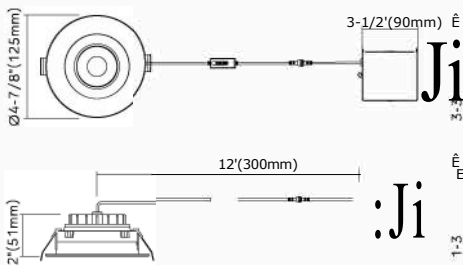

Specifications			
modèle	LRRFG4R		
Applications	Plafond en pente, mettant en valeur les œuvres d'art		
Wattage	12W		
Color	Single CC	3CCT	5CCT
Temperature(K)	3000/4000/5000	3000/4000/5000	2700/3000/3500 /4000/5000
Lumen Output(lm)	1000/1020/1040	900/920/940	800/810/820 /840/860
Halogen Equivalent	100W		
Bearn Angle	38°		
CRI	80/90		
Driver Input	120V AC		
Power Factor	0.9		
Dimming	TRIAC dimmers 100%-10%		
Cut out	4-3/8" (110mm)		
Approved Location*	Insulated ceiling, Indoor & Damp/Wet location		
Ambient Temperature	-40°C to +40°C		
Air Tight	Yes		
Projected Life	70% light output at 50, 000 hours		
Certification	ETL, Energy star & T24		
Warranty*	Retail: lifetime warranty	Project: 7-year warranty	
Approved Location*-please contact our sales for outdoor application			
Warranty*-refer to Lightonia warranty policy			

120V Input Driver Included



Accessories

AC120V driver



Rough-in plate



061/4"(160mm) -
 04 1/4"(111Cmm)
 02 7/8"(72mm)

Madel: LR-RP-U

Extension cables (2pin)



For single CCT or multiple CCT fixtures with CCT switch on the wire
 Madel: LR-EXC6 6 2pin cable
 LR-EXC10 10' 2pin cable
 LR-EXC20 20' 2pin cable

Extension cables (3pin)



For multiple CCT fixtures with CCT switch on the junction box
 Madel: LR-EXC6-S3 6 3pin cable
 LR-EXC10-S3 10' 3pin cable
 LR-EXC20-S3 20' 3pin cable

Ordering Guide

Example: LRRFG4R-12W-5CCT-MW

Series	Wattage	Color Temperature	Voltage	Finish
LRRFG4R	12W	30K CCT 40K CCT 50K CCT 3000K-Single CCT 5000K-Single CCT 3CCT (3000K/4000K/5000K) 5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120Vonly	<ul style="list-style-type: none"> ● MW (Matte White) ● MB (Matte Black) ● EZ (Bronze) ● BN (Brushed Nickel) *

*-Custom finishes are available