



AFR4G-12

4' Gimbal Round Recessed LED



Catalog #		Type
Project		Date
Prepared by		

Recessed Light

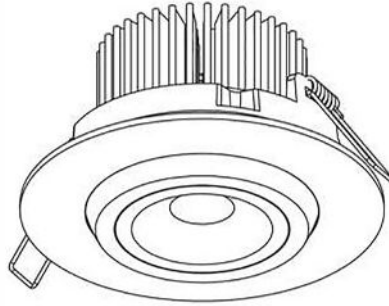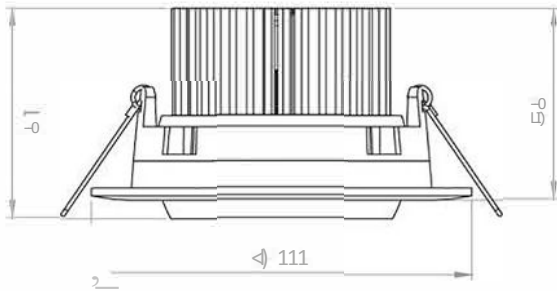

-BN



-BK



-WH

DESIGN FEATURES

- Air-tight and damp location approved
- Perfect for limited space locations - only 2-1/4" thick
- Type IC rated - approved for direct contact with insulation
- Pot light housing is not required even for insulated ceilings
- Isolated driver inside junction box

• Body

- Stamping forming aluminium heat radiation shell

Dimming

- When used with TRIAC dimming contrais (Consul! factory for compatible dimmers).

Warranty

- 50,000hr of lamp life.

- Listing** - ETL Listed.
- Energy star

SPECIFICATION	
LED Guontity	COB
Input Voltage	120VAC
Wattage (+/-5%)	12W
Lumen (+/-5%)	935lm/850lm
Efficacy(LPW) (+/-5%)	>70lm/W
Color (+/-5%)	30K, 40K, 50K,60K
CRI (Typicall)	>80 / 90
Beam Angle	40° Beam with 30° tilt and 360° rotation
Dimming	Triac
Lomp Life	50,000hr
Environment	Indoor,Damp

120V Approved Dimmers

- Lutron : TGCL- I 53PH
: LGCL- 153PH
: MACL-153M
: DVCL-153P
: CTCL-153P
- Leviton: 6672
6674
IPL06
- Pass&seymour:HCL453P
- Cooper:SALO6P

Consuh tech. serviaæ or fodory /or additiono/ dimmers



Ver: 1.0

Luminaire Galarneau

5425 Boui. des Forges, Trois-Rivières (QC) Canada,
G8Y 5L5

Tel: (819) 693-6336, Fax: (819) 693-9996

www.luminairegalarneau.com

