

DESCRIPTION

Pure geometry of the disks of illumination balancing on clean, thin lined structure is poetry in motion. Each disk of illumination can turn and twist to fit the needs and style of your space. The Novel Collection fits a large range of style and function with minimal elements.






SF72205-BK Black

SPECIFICATION DETAILS

* For custom options, consult factory for details.

Fixture Dimensions L6-1/8" x W5-1/4" x H6-1/2" Light Source LED with DC Driver Wattage 8W Total Lumens 680lm Delivered Lumens 260lm* Voltage 120V Color Temperature 3000K CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years Canopy Dimensions D5-1/4" x H1"		
Wattage 8W Total Lumens 680Im Delivered Lumens 260Im* Voltage 120V Color Temperature 3000K CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Fixture Dimensions	L6-1/8" x W5-1/4" x H6-1/2"
Total Lumens 680 lm Delivered Lumens 260 lm* Voltage 120 V Color Temperature 3000 K CRI (Ra) 90 CRI Optional Color Temps 2700 K - 5000 K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Light Source	LED with DC Driver
Delivered Lumens 260Im* Voltage 120V Color Temperature 3000K CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Wattage	8W
Voltage 120V Color Temperature 3000K CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Total Lumens	680lm
Color Temperature 3000K CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Delivered Lumens	260lm*
CRI (Ra) 90CRI Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Voltage	120V
Optional Color Temps 2700K - 5000K Available, Minimum Order Quantities Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Color Temperature	3000K
Apply LED Rated Life 50,000 hours Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	CRI (Ra)	90CRI
Dimming 100% - 10%, TRIAC or ELV Dimmer (Not Included) Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	Optional Color Temps	
Diffuser Details Frosted Acrylic Light Guide Panel Location Dry Warranty 5 Years	LED Rated Life	50,000 hours
Location Dry Warranty 5 Years	Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Warranty 5 Years	Diffuser Details	Frosted Acrylic Light Guide Panel
•	Location	Dry
Canopy Dimensions D5-1/4" x H1"	Warranty	5 Years
	Canopy Dimensions	D5-1/4" x H1"

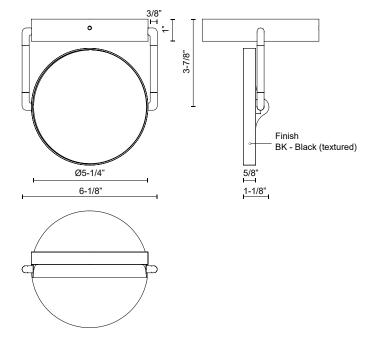



19054 28TH AVENUE SURREY - BC V3Z 6M3 CANADA COMMENT

