

LED DISK LIGHT



NEED HELP?
Call or Email us first

Our service team is ready to answer your questions...
1-800-265-1833 (English) / 1-800-567-2513 (French)
IN CANADA - resalescanada@canarmna.ca - IN USA - resalesusa@canarmna.ca

Monday – Friday
8 AM - 5 PM EST.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

**IMPORTANT SAFETY
INSTRUCTIONS**

SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters

Wiring supplies
as required by
local electrical
code



Pliers



Wrench


WARNING:

1. READ ALL INSTRUCTION BEFORE INSTALLATION.
2. SYSTEM IS INTENDED FOR INSTALLATION BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND LOCAL REGULATIONS.
3. GO TO THE MAIN FUSE BOX, OR CIRCUIT BREAKER. PLACE THE MAIN POWER SWITCH IN THE "OFF" POSITION AND UNSCREW THE FUSE(S) OR SWITCH "OFF" THE CIRCUIT BREAKER SWITCH(ES) THAT CONTROL THE POWER TO THE FIXTURE OR ROOM THAT YOU ARE WORKING ON.
4. PLACE THE WALL SWITCH IN THE "OFF" POSITION.
5. SUPPLY CONDUCTORS (POWER WIRES) CONNECTING THE FIXTURE MUST BE RATED MINIMUM 90°C. IF UNCERTAIN, CONSULT AN ELECTRICIAN.

CAUTIONS:

1. THESE LUMINAIRES (FIXTURES) ARE DESIGNED TO MEET THE LATEST NEC REQUIREMENTS AND ARE LISTED IN FULL COMPLIANCE WITH ETL LIST.
2. BEFORE ATTEMPTING INSTALLATION, CHECK YOUR LOCAL ELECTRICAL CODE, AS IT SETS THE WIRING STANDARDS FOR YOUR LOCALITY.
3. SUITABLE FOR WET LOCATION.
4. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR COOL. WIPE THE FIXTURE WITH A CLEAN AND SOFT CLOTH.

INSTALLATION

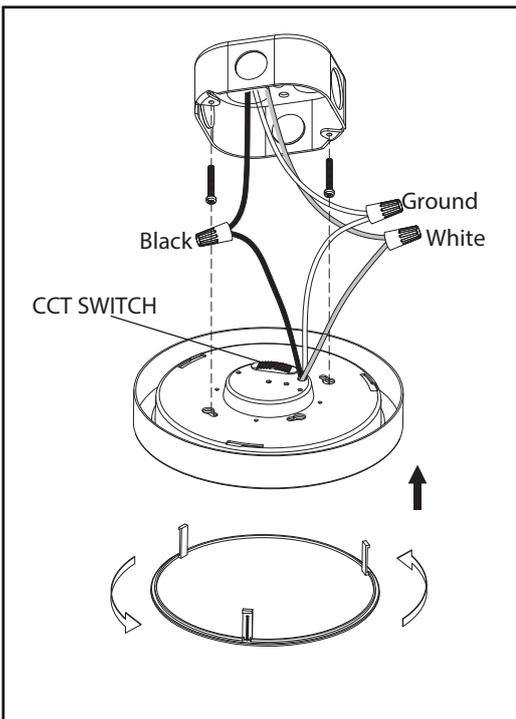

Over standard electrical junction box

1. Provide electrical service according to the "National Electrical Code" or your local electrical code to the junction box.
2. Secure the mounting screws (only screwing on halfway) to electrical box.
3. Use the slide switch to choose a color temperature. The options are 2700K, 3000K, 3500K, 4000K and 5000K.
4. Connect supply wires to fixture wires and insulate with proper size wire nuts. Connect incoming ground wire (green or bare) to fixture ground wire (green or bare). Connect incoming common (white) wire to fixture white wire. Connect incoming hot (typically black) wire to fixture black wire.
5. Once the wires are connected, ensure to push back all the wire nuts into the junction box.
6. Twist the lens anticlockwise to open the fixture.
7. Raise the disc light to the junction box. Tighten screws to firmly hold the fixture in place.
7. Twist the lens clockwise on disk light metal enclosure and lock the lens in place.
9. After installation, seal around the perimeter between the fixture and the ceiling with weather resistant caulk.

DL-7F-15DCW: Max # of Lamps per 150W Dimmer: 10 pcs
DL-9F-20DCW: Max # of Lamps per 150W Dimmer: 7 pcs
DL-11F-25DCW: Max # of Lamps per 150W Dimmer: 6 pcs

Compatible wall dimmers : Leviton# 742-66EV-P0W, Leviton# 742-6672-HLW, Leviton# 722-6674-PDW, Lutron# SCL-153PH-WH