

X-LINE LINEAR TRACKLIGHT



X-LINE TRACK

LINEAR TRACKLIGHT

X-Line Track G2 is a super slim and high-efficiency with up to 140lm/w linear track light, offers excellent illumination, exceptional performance, versatility and flexibility in museums, hotels, restaurants, fashion shop, retail stores, office, classrooms, conference rooms, etc.

Type A applies high-transmission PC lens, 70°/90°/asymmetric/double asymmetric to have various lighting distribution, type B adopts opal cover for uniform illumination. It features a field-changeable adapter for compatibility with both one circuit and two circuit H-type and J-type tracks.

It also can be flexibly combined with track spotlights on the same track rail for general lighting & accent lighting, it allows end user select CCT (3000-3500-4000K) and adjustable power with DIP switch.



FEATURES & BENEFITS



WATTAGE SWITCH

Easy to operate




COLOR TEMPERATURE SELECTABLE

3000K-3500K-4000K
Selectable CCT





ADAPTER REPLACEMENT

Field changeable H type
and J type adaptor




LENS REPLACEMENT

Field changeable 70°, 90°,
Asymmetric, Double
Asymmetric lens

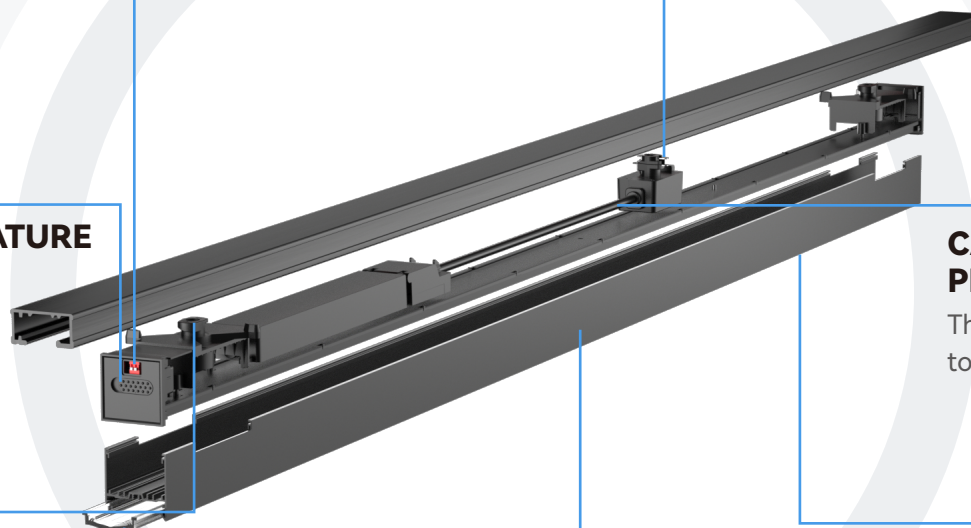

PUSH PIN

Push pin up and down,
compatible both one
circuit and two circuit
track rail.




CAN TRAVEL TO PROPER POSITION

The linear track can slide flexibly up
to 8 inch for 4feet version.



HIGH EFFICIENCY

Up to 140lm/w



SUPER SLIM DESIGN

Nearly same width with
H/J type track rail

FEATURES & BENEFITS

01

Combines flexibly with other track spotlights in one rail for both ambient and accent lighting.

02

Offers interchangeable optics (70°, 90°, Asymmetric, Double Asymmetric) for versatile application.

03

Delivers high performance with selectable CCT (3000-3500-4000K), Ra90, and up to 140 lm/W efficacy.

04

Includes a built-in 120V Triac/ELV dimming driver for broad dimmer compatibility.

05

Flicker-free performance (SVM<0.4, Pst<1) meets ErP 2024 and IEEE 1789 standards.

06

On-site wattage adjustment via DIP switch reduces required SKU variations.

07


Super-slim profile matches the width of standard H/J-type track rails (1.5 inches).

08


Features a field-changeable adapter for compatibility with one circuit and two circuit H-type and J-type tracks.

09


Tool-free mechanical and electrical installation




70°



90°



Asymmetric



Double Asymmetric

PARAMETERS

X-Line Track G2 4ft Ordering Guide(The test data based on 3500K Ra90)

Product	Dimming	Installation	Watt(W)	Beam Angle(°)	Lumen(lm)	Intensity(cd)	CCT(K)	Finish Color
X-Line Track G2 4ft	Triac/ELV	H type track J type track	40W-35W -30W	70	5300	2600	3000-3500- 4000	BK WH
				90	4800	2000		
				Asymmetric	4500	2500		
				Double Asymmetric	5000	2200		

X-Line Track G2 2ft Ordering Guide(The test data based on 3500K Ra90)

Product	Dimming	Installation	Watt(W)	Beam Angle(°)	Lumen(lm)	Intensity(cd)	CCT(K)	Finish Color
X-Line Track G2 2ft	Triac/ELV	H type track J type track	20W-15W -10W	70	2800	1600	3000-3500- 4000	BK WH
				90	2600	1100		
				Asymmetric	2500	1500		
				Double Asymmetric	2700	1300		




APPLICATION

Museums, hotels, restaurants, fashion shop, retail stores, office, classrooms, conference rooms, etc .


QUICK INSTALLTION

1. Make sure the arrow on the adaptor points towards the groove of the track rail

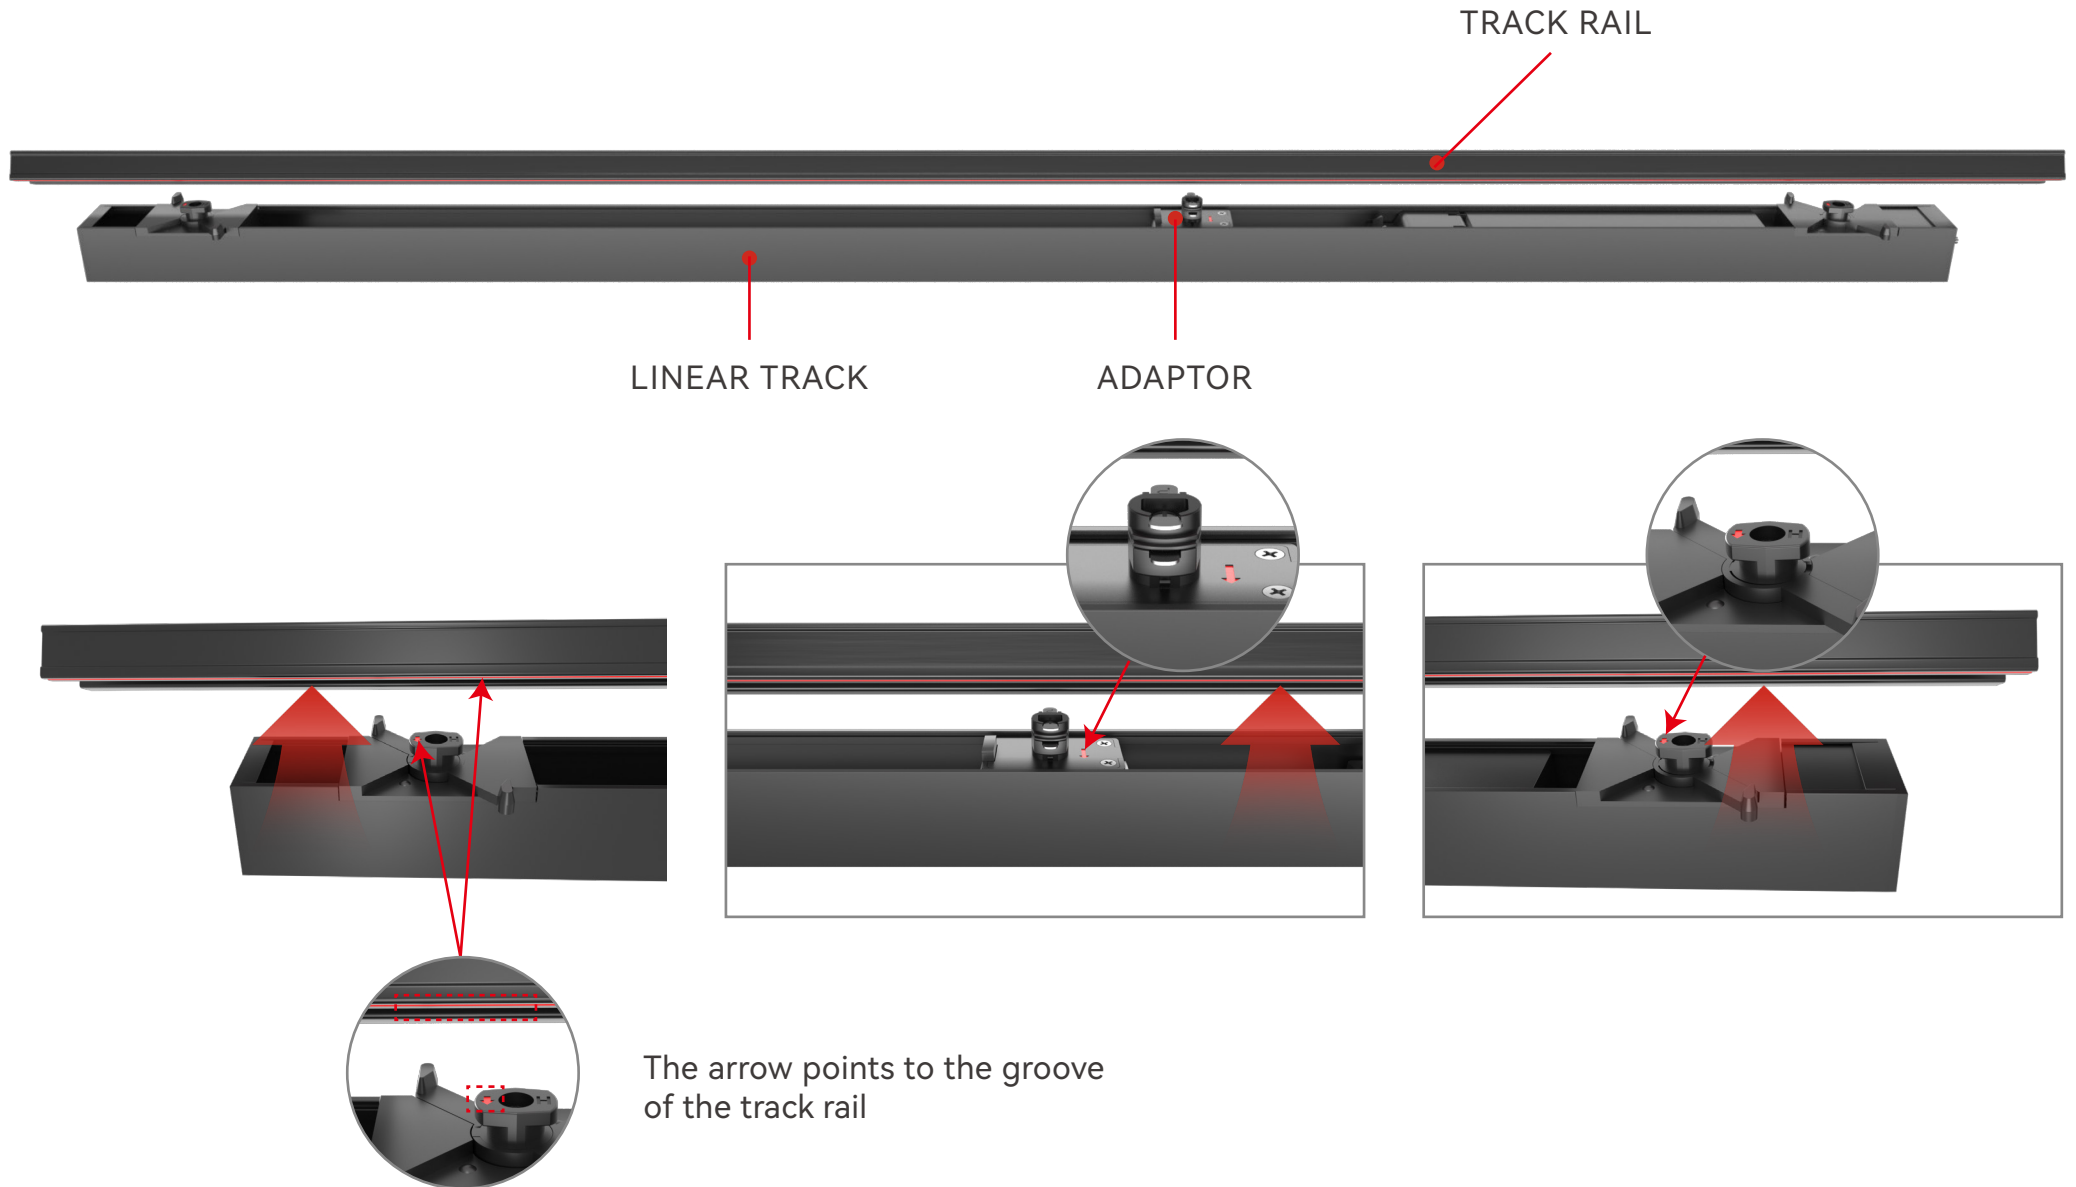


QUICK INSTALLTION


2. Insert adaptor into track and pull tab, rotate 90deg counter clockwise to lock it into H type track(rotate 90deg clockwise to lock it into J type track).

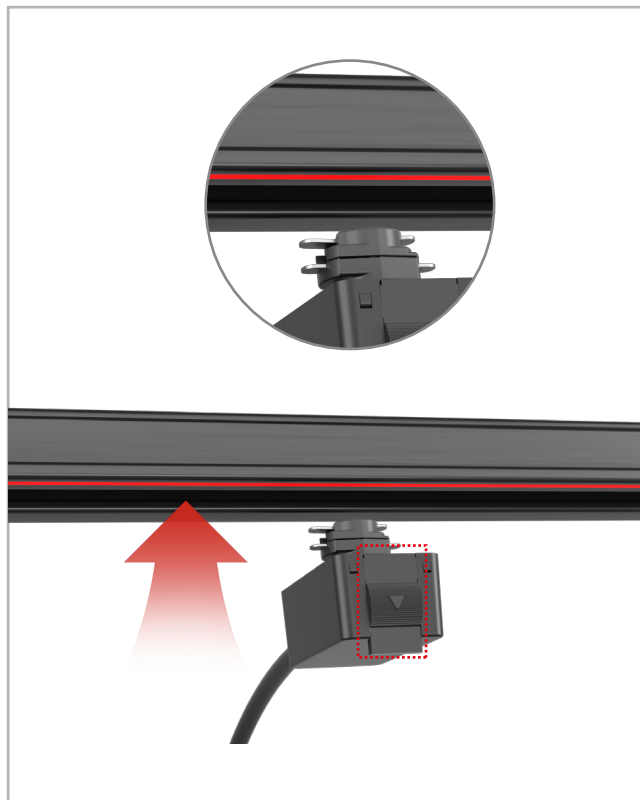

1

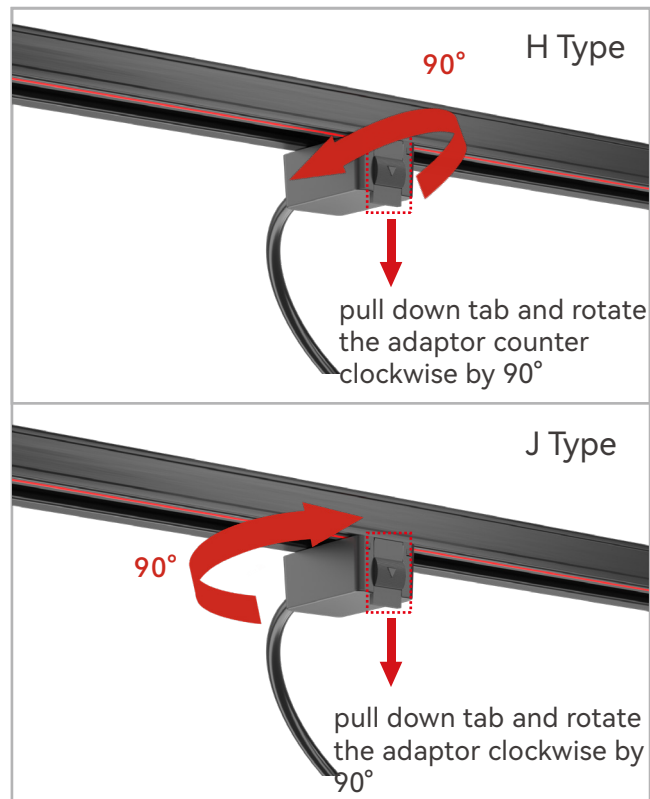

2

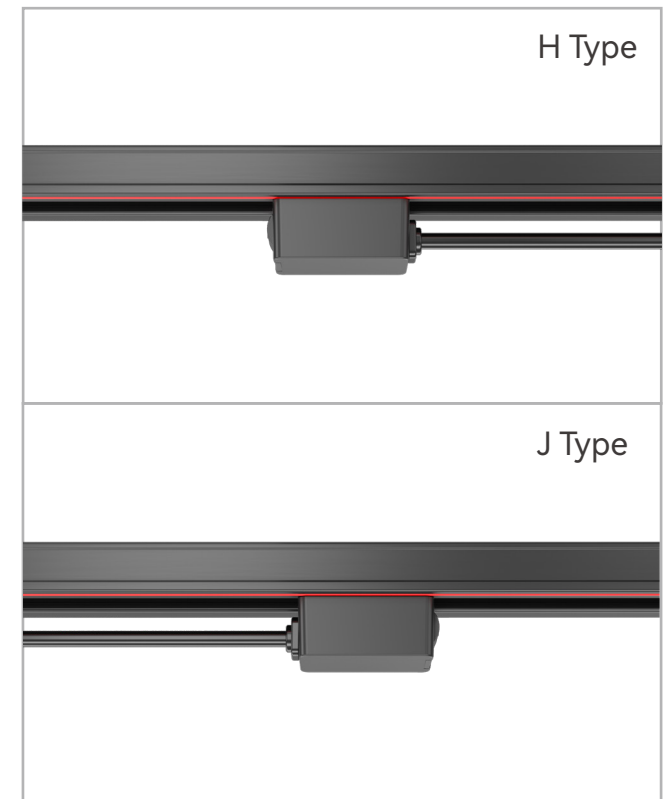

3


QUICK INSTALLTION

3. Install the fixture and rotate the knob.




Linear track can slide flexibly up to 8 inch for 4feet version.

4

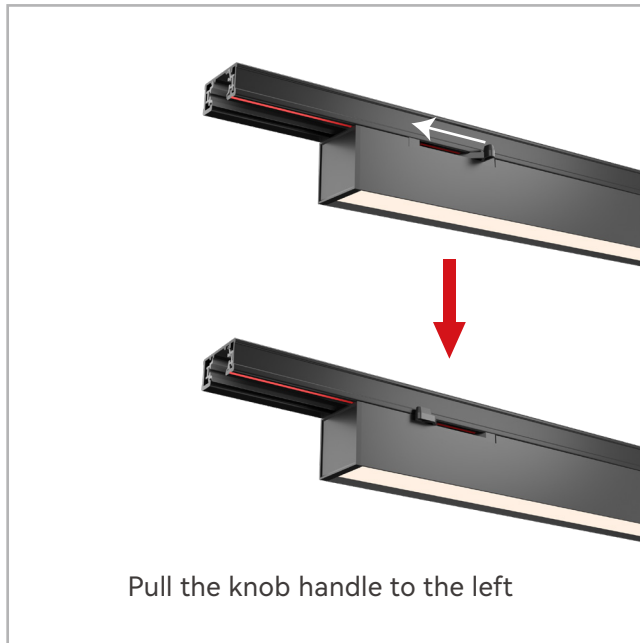

Pull the knob handle to the left

5

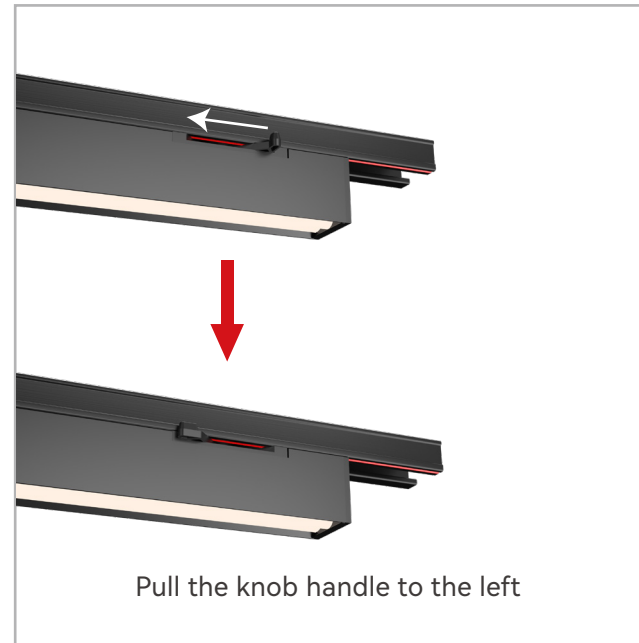

Pull the knob handle to the left

6




Installation completed

MECHANICAL UNIT: MM(inch)

X-Line Track G2 linear tracklight —4 Feet

Unit:mm(inch)

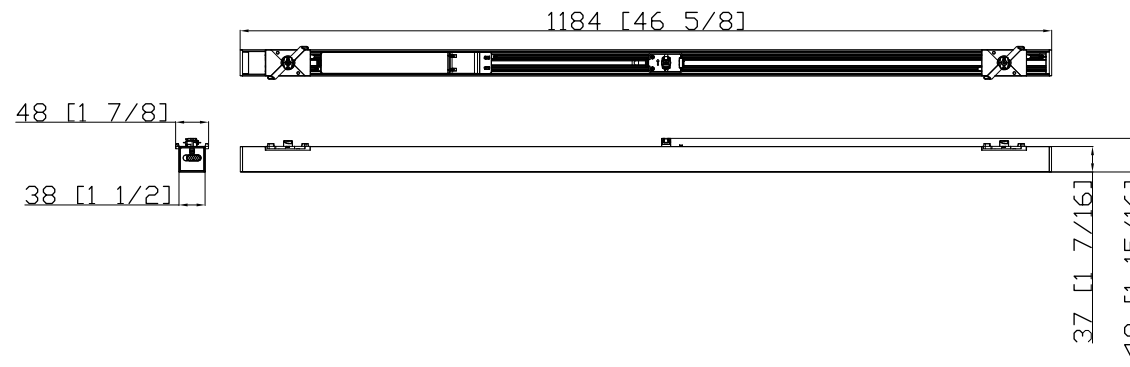

X-Line Track G2 linear tracklight —2 Feet

Unit:mm(inch)

