



















M series LED controller is compatible with 8 kinds remotes of different function (patent technology) . which means using one receiver could experience single color/CT dimming, RGB/RGBW adjustment to meet customers' different lighting requirements. With the RF remote, speed/brightness adjustment. customise color and lighting changing modes selection could all be achieved

1. Parameter:

Remote(RGBW):

Model:	M4/M8		

Working Voltage: 3Vdc (battery CR2032)

Working Frequency: 433.92MHz Remote Distance: 30m

-30°C~55°C Working Temp.:

Weight(N.W.): 42g


CV Receiver (RGBW):

Weight(N.W.):


Model:	M4-5A		
Input Voltage:	12~24Vdc		
Current Load:	5A×4CH Max 20A		
Max Output Power:	(060W~120W) × 4CH		
Protection:	Short circuit / Over-load		
Working Temp.:	-30° C ~55° C		

125g

2. System Diagram:

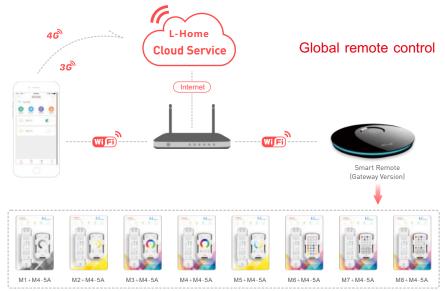

3. Product Size:

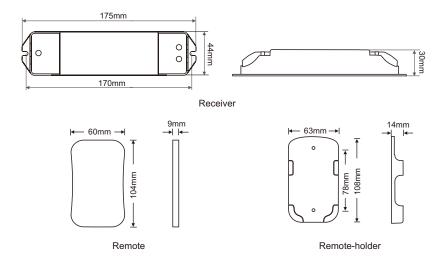

www.ltech-led.com





4. The Learning ID Method of Remote Control:

Remote control has been matched to the receiver before leave factory, if deleted accidentally, you can learn ID as follow.

Learning ID: Short press ID learning button on the M4-5A receiver, the running light is on, then press any key on the M4/M8 remote control, the running light flashes several times, activated.


Cancel ID: Long press ID learning button on the M4-5A receiver for 5 seconds.

Attn: one receiver can be matched with max 10 same or different kinds remote.

5. Operating Instruction for Receiver:



6. Operating Instruction for Remote Control:

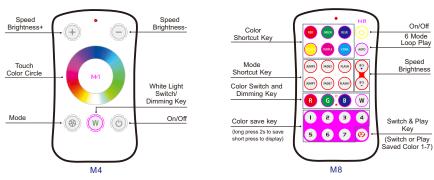

M4 Changing Mode Table

ı	No.	Mode	Instrutcion	No.	Mode	Instrutcion
	1	Static Red	Brightness Adjustable	7	Static White	Brightness Adjustable
	2	Static Green	Brightness Adjustable	8	RGB Skipping	Speed/Brightness Adjustable
	3	Static Blue	Brightness Adjustable	9	7 Colors Skipping	Speed/Brightness Adjustable
ſ	4	Static Yellow	Brightness Adjustable	10	RGB Color Smooth	Speed/Brightness Adjustable
	5	Static Purple	Brightness Adjustable	11	Full-color Smooth	Speed/Brightness Adjustable
	6	Static Cyan	Brightness Adjustable	12	Static Black	White light can be turn/off and adjusted

7. Wiring Diagram:



