



LED FIXTURE

SSL Series



LED Doorway Light SSL-DW2

Enhanced LED performance in a classic design, offers maximum light output for general purpose area, and security lighting.

Multiple Kelvin and Multiple Wattage Selection



Features & Benefits

cULus listed

Switchable CCT (30K/40K/50K) and Wattage (30L unit only)

120-277 Voltage, CRI≥70

IP 65, Wet location rated

Die-cast aluminum, PC Lens

Dark bronze coat finish

L70 @ 50,000 Hrs

Photocell Sensor installed

Junction box mounted

Warranty


5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C

Applications

Security, entryways, stairways, storage, and perimeter areas, as well as residential exteriors

Dimensional drawing

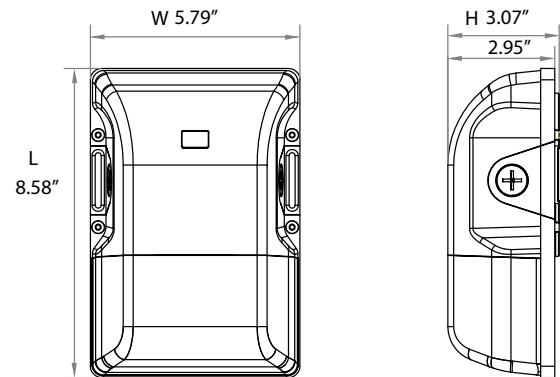

Ordering Information Example: SSL-DW2/15W/MK/UNV/PC/DB

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Lens	Finish
SSL (Solid State Lighting)	DW2 (LED Doorway Light)	15W 26W 30L (30-22-15W)	MK (Multi CCT)	UNV (120-277V)	PC (Polycarbonate)	DB (Dark Bronze)

Product Specification

Ordering Code	DLC/ DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3662157	NO	SSL-DW2/15W/MK/UNV/PC/DB	15	120-277V	50,000	1950	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10
3664152	NO	SSL-DW2/26W/MK/UNV/PC/DB	26	120-277V	50,000	3225	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10
3680102	DLC-P	SSL-DW2/30L/MW/MK/UNV/PC/PB	30-22-15	120-277V	50,000	3741-2750-1875	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10