

# LED FIXTURE

## SSL Series



### LED Mini Flood SSL-MFL

Enhanced LED performance in a classic design  
Multiple Kelvin Selection



Kunckle Mount



Trunnion Mount



#### Features & Benefits

- cULus listed

---

- Switchable CCT (30K/40K/50K)

---

- Optional installation of **Kunckle** and **Trunnion** Mount

---

- IP 65, Wet location rated

---

- 120 Voltage, CRI≥70

---


- Dark bronze coat finish

---


- L70 @ 50,000 Hrs

#### Dimensional drawing

##### 30W

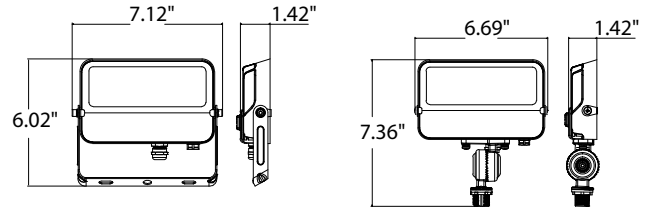

##### 50W

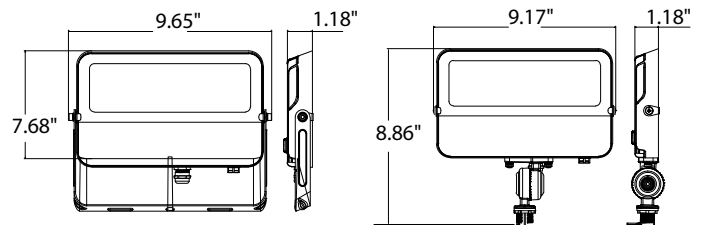

#### Warranty

- 5-year limited warranty in commercial use from the date of purchase

---

- Operating temperature range between -40°C and +45°C

#### Applications

Building facades, displays, landscaping, security lighting, walkways and other work areas

#### Ordering Information Example: SSL-MFL/30W/MK/120V/DB/KNC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Finish	Mounting
SSL (Solid State Lighting)	MFL (LED Mini Flood)	30W 50W	MK (Multi CCT)	120V	DB (Dark Bronze)	KNC (Kunckle Mounting) TRU (Trunnion Mounting)

#### Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Case QTY.
3664153	SSL-MFL/30W/MK/120V/DB/KNC	30	120V	50,000	3150	30-40-50	≥70	Yes	24
3664154	SSL-MFL/30W/MK/120V/DB/TRU	30	120V	50,000	3150	30-40-50	≥70	Yes	24
3665170	SSL-MFL/50W/MK/120V/DB/KNC	50	120V	50,000	5250	30-40-50	≥70	Yes	16
3665171	SSL-MFL/50W/MK/120V/DB/TRU	50	120V	50,000	5250	30-40-50	≥70	Yes	16