

LED FIXTURE

RIGID Series

LED Flush Mount (Polycarbonate) RGD-FM14/MK/D/SLIM/PC

LED Slim PC round ceiling light
14", 5 Multi-K selectable



Features & Benefits

CETL listed, Energy Star

Size 14", CRI >80

5 CCT colour selectable 2700/3000/3500/4000/5000K

L70 @ 50,000 Hrs

TRIAC dimmable


PMMA diffuser, white finish

Damp location approved

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +40°C

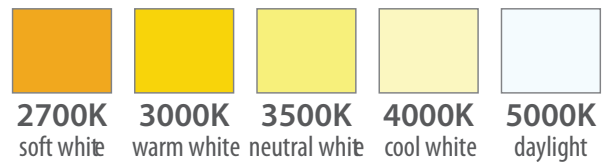

5 CCT Colour Selectable


Product Specification

Ordering Code	Energy Star	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CRI	Damp Location	M.O.D. (inch)	Case QTY.
3664155	Y	RGD-FM14/24W/MK/D/SLIM/PC	LED Flush Mount 14" 24W Multiple Kelvin Polycarbonate	24	120	50,000	1800	80	Y	14	8

Applications

Bedrooms, living rooms, hallways, kitchens and etc

Dimensional drawing

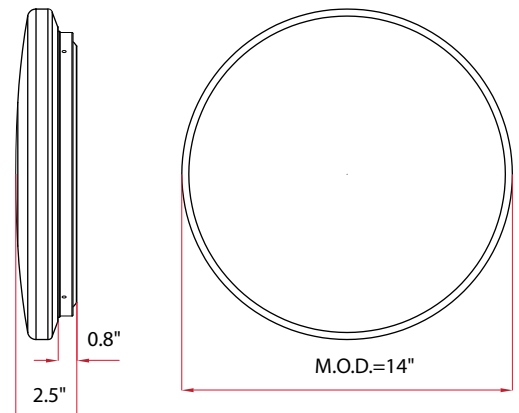

Ordering Information Example: RGD-FM14/24W/MK/D/SLIM/PC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Dimmable	Body
RGD (Rigid)	FM14 (LED 14" Flush Mount)	24W	MK (Multiple Kelvin Selection)	D (Dimmable)	SLIM/PC (Slim Polycarbonate)