

## Individual Spec Sheet

# L1KCL GEN2

## KOLIKA QUICK SHIP - L1KCL GEN2

### ORDERING INFORMATION

**Order code:** 68579  
**Model number:** L1KCL-G2-4LS2U-3C-BK  
**UPC:** 069549017559  
**Case quantity:** 6

### PHYSICAL DATA

**Dimensions:** 4' (48")  
**Lens material:** Opal acrylic  
**Housing material:** Extruded aluminum  
**Mounting:** Suspended - Individual or row mounted

### PERFORMANCE DATA

**Watts (W):** 40  
**Volts (VAC):** 120-277  
**Color temperature (K):** 3 000/3 500/4 000  
**Lumen output (lm):** Total lumens: 4 361 / Uplight lumens: 1 090 / Downlight lumens: 3 271  
**Efficiency (lm/W):** 109  
**CRI:** 80+  
**Life L70 (h):** 54 000  
**Tested LM-80 (h):** 36 000  
**Dimming:** 0-10V  
**Power factor:** >0.9  
**THD (%):** <15  
**Frequency (Hz):** 50/60  
**Input current (A):** 0.14/0.33A Max  
**Output current (mA):** 800  
**Operating temp. range:** -20°C ~ +55°C

<sup>1</sup> Typical colour temperature range: +/- 5 %

<sup>2</sup> Lumen values are based on 3 500K default setting

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

### COMPATIBLE ACCESSORIES

Order code	Type
68584	Continuous kit for row mounting


### COMPATIBLE DIMMERS

Brand	Model
LUTRON	DVSTV-WH DDTV-WH
EATON	DF10P-C1
COOPER	SF10P-W
LEVITON	DS710-10Z

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

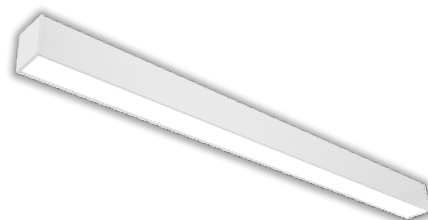

**5** yrs  
warranty

quick ship

LED fixture

dimmable

**6**  
damp location


ICCS 005

Direct / Indirect Light

**3**  
CCT TCC  
3000 K / 3500 K / 4000 K


UL US

## DIMENSIONS

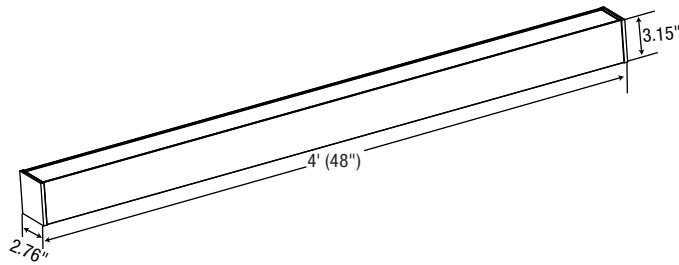PHOTOMETRIC DATA<sup>1</sup>

68579 • L1KCL-G2-4LS2U-3C-BK • 4 413.6 lm

## Polar candela distribution

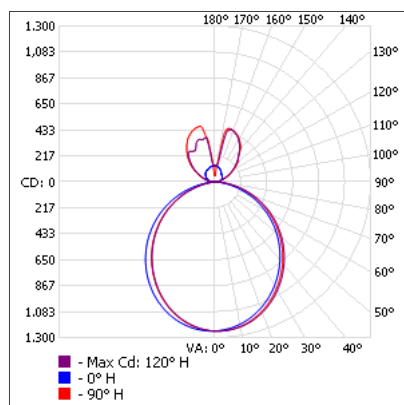

## Zonal lumen summary

Zone	Lumens	% Fixture
0-30	956.0	21.7
0-40	1 549.1	35.1
0-60	2 687.9	60.9
60-90	662.3	15
70-100	286.1	6.5
90-120	218.4	4.9
0-90	3 350.1	75.9
90-180	1 063.5	24.1
0-180	4 413.6	100

## Illuminance at a distance

	PCenter beam fc		Beam width
2.0'	314.7		5.5' 5.3'
4.0'	78.7		11.0' 10.6'
6.0'	35.0		16.6' 15.8'
8.0'	19.7		22.1' 21.1'
10.0'	12.6		27.6' 26.4'

■ Vert. spread: 108.1°  
■ Horiz. spread: 105.7°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
 All products are subject to change or may be discontinued any time without notice.