LUMINAIRE
Galarneau
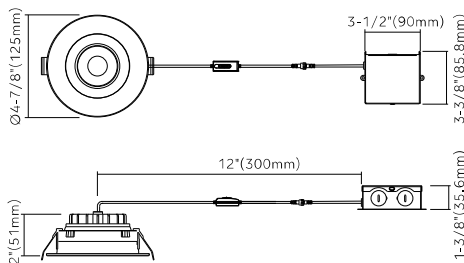
4" Round

Key Features

- 4" round flat LED recessed regress gimbal with integral driver in connection box
- Eyeball, round regressed & square regressed models
- Type IC rated-no housing needed
- Single CCT or multiple CCT are available
  Flexibility to switch color temperature during installation to suit a specific application, just adjust the color temperature with the slide switch located on the fixture
- Superior LED performance and lifespan
- 30° tilting, 360° rotation
- Cut hole in ceiling and snap fixture in opening with attached spring clips
- Aluminum construction

Specifications

Models	LRRFG4R		
Applications	Sloped ceiling, highlighting artwork		
Wattage	12W		
Color Temperature(K)	Single CCT	3CCT	5CCT
	3000/4000/5000	3000/4000/5000	2700/3000/3500/4000/5000
Lumen Output(lm)	1000/1020/1040	900/920/940	800/810/820/840/860
Halogen Equivalent	100W		
Beam Angle	38°		
CRI	80/90		
Driver Input	120V AC		
Power Factor	0.9		
Dimming	TRIAC dimmers 100%-10%		
Cut out	4-3/8" (110mm)		
Approved Location*	Insulated ceiling, Indoor & Damp/Wet location		
Ambient Temperature	-40°C to +40°C		
Air Tight	Yes		
Projected Life	70% light output at 50, 000 hours		
Certification	ETL, Energy star & T24		
Warranty*	Retail: lifetime warranty	Project: 7-year warranty	

Approved Location*-please contact our sales for outdoor application
Warranty*-refer to Lightonia warranty policy

120V Input Driver Included

Dimensions

Accessories

AC120V driver
Model: LR-D120-12A (Aluminum version)
Model: LR-D120-12SFB (Steel version)
Model: LR-D120-12SF (Steel version)

Rough-in plate
Ø6 1/4"(160mm)
Ø4 1/4"(110mm)
Ø2 7/8"(72mm)
Model: LR-RP-U

Extension cables (2pin)
For single CCT or multiple CCT fixtures with CCT switch on the wire
Model: LR-EXC6   6' 2pin cable
LR-EXC10   10' 2pin cable
LR-EXC20   20' 2pin cable

Extension cables (3pin)
For multiple CCT fixtures with CCT switch on the junction box
Model: LR-EXC6-S3   6' 3pin cable
LR-EXC10-S3   10' 3pin cable
LR-EXC20-S3   20' 3pin cable

Ordering Guide

Example: LRRFG4R-12W-5CCT-MW

Series		Wattage	Color Temperature	Voltage	Finish
LRRFG4R	Lightonia Recessed Regress Flat Gimbal -4" Round	12W	30K (3000K-Single CCT) 40K (4000K-Single CCT) 50K (5000K-Single CCT) 3CCT (3000K/4000K/5000K) 5CCT (2700K/3000K/3500K/4000K/5000K)	(Blank) 120V only	MW (Matte White) MB (Matte Black) BZ (Bronze) BN (Brushed Nickel) *

*-Custom finishes are available