
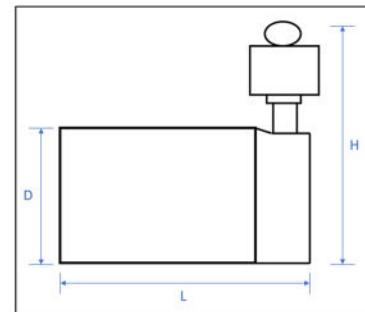


SPECIFICATION:

| | |
|---------------|--|
| Product Code | KL-TR-025.U0X |
| Product Name | 15W 1420M smarter LED track light fixtures |
| Input voltage | 220-240V |
| Power | 15W |
| Power factor | >0.95 |
| Dimmable | Triac(Trailing and Leading) |
| Lumen Flux | 1420LM |
| Beam Angle | 15°,24°,38°,60° |
| CCT Optial | 2700K/3000K/3500K/4000K/5000K |
| CRI Optial | CRI82(CRI 98 is available) |
| Dimension | 70x122x148 |
| Finish | Black/White/Silver |

FEATURES:

- Available in modularized and customizable design utilizing interchangeable and removable components of optics, light engines, led drivers, adaptors and lens.
- Offering desired quality lighting with great savings with an outstanding luminous efficacy of up to 120lm/W
- Illuminating objects with clear and vivid appeal due to high color rendering index of up to 98
- Offered at 2700K/3000K/3500K/4000K/5000K
- Supplied with movable and interchangeable optics of 15°,24°,38°,60° for producing differentiated lighting distributions based on various applications
- Ceiling-mounted, pendant, wall-mounted or track-mounted contemporary LED track lighting
- Triac Dimming range 10-100%
- Extending compatibility with Juno,Halo, Lightolier, and GLOBAL(Htek:277V, Tek:120V) track system
- Finish: White, black, silver.
- Extrusion pure aluminum heat sink
- CE/ROHS/Energy Star/DLC/ETL certified

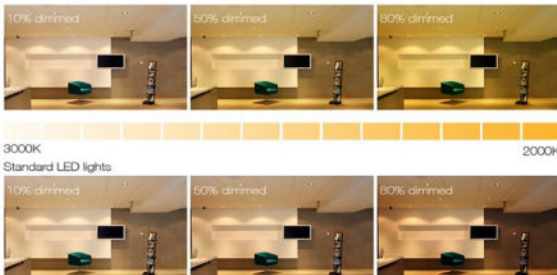

| Puissance | D | L | H |
|-----------|----------|----------|--------|
| 8W | 2 3/8" | 4 3/16" | 4 3/4" |
| 10W | 2 3/4" | 4 13/16" | 5 1/4" |
| 15W | 2 3/4" | 4 13/16" | 5 1/4" |
| 22W | 3 3/16" | 6 7/8" | 6 1/2" |
| 42W | 3 15/16" | 6 7/8" | 6 1/2" |