


Features

- * Edge-lit technology to produce a smooth uniform lighting effect
- * 2700K, 3000K, 3500K, 4000K, 5000K CCT field select
- * 90 CRI (80CRI is optional)
- * Construction: aluminum and white translucent acrylic lens
- * Suitable for WET LOCATION
- * IC rated for direct contact with insulation
- * 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- * L70 @ 50,000 hrs




DIMENSION

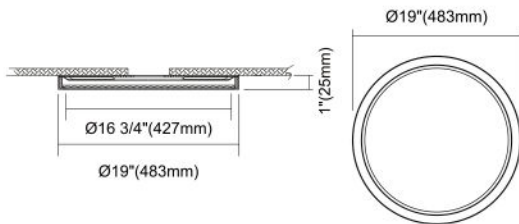

19" Die-cast Aluminum Round

INSTALLATION

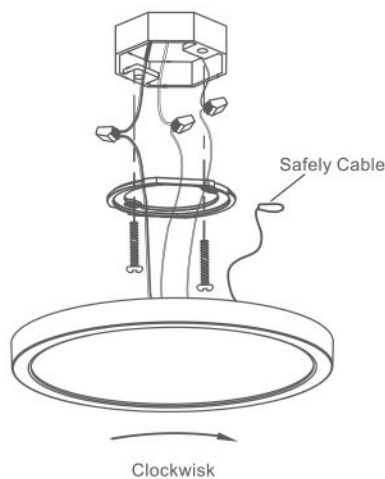

ORDERING

MODELS	CCT	FINISH
ADS19R = 19" Round Slim Surface	Tunable CCT = 3CCT(2700K, 3000K,5000K) 5CCT(2700K-5000K)	YY=WH(White), BK(Black), BN(Brushed Nickel), BZ(Bronze)

Notes:

* YY represents different color finish, WH for white; BN for brushed nickel; BK for Black; BZ for Bronze.
Example: 19inch Round Slim Surface 3CCT WHITE, ADS19R Tunable CCT 3CCTWH

SPECIFICATIONS	ADS19R
Lumens	2200lm
Watts	35W
Efficacy	66lm/W
CRI	80Ra or 90Ra
CCT	3CCT(3000K,4000K,5000K), 5CCT (2700K-5000K)
Input Volts & Frequency	AC120V, 60Hz
Power Factor	>0.9
Operating Temp.	-20° ~ 40°
Beam Angle	120°

PACKAGE	
Weight.(g)	2800g
Qty/CTN (pcs)	4pcs/CTN
Box Dimension	523x523x222mm
Gross Weight	13.2kg/CTN

INCLUDED IN BOX

- 19" Aluminum Die-cast Round Slim Surface
- Mounting Bracket to J-Box
- Four Mounting Screws
- Three Wire Nuts



Octagon
steel light fixture / fan box
4" x 4" x 2-1/8"



Round
new work fixture box (plastic)
4" diameter x 2-3/16"



Square
steel deep box
4" x 4" x 1-1/2"



Round
old work fixture box (plastic)
4" diameter x 2-3/16"



Round
new work ceiling box (plastic)
3-1/2" diameter x 2-3/4"



Round
new work fixture box (plastic)
with bar hanger
4" diameter x 2-3/16"



Round
surface mount
4" diameter x 1-1/2"



Round
ceiling pan
4" diameter x 13/16"



TP317
Eaton's Crouse-Hinds junction box
for metal clad cable
4" x 2-1/8"



TP316
Eaton's Crouse-Hinds junction box
for non-metallic cable
4" x 2-1/8"

Dimmer Compatible List

Brand	Series	Model	Load	Dimmability
Lutron	Diva	DVCL-153P	150W	20%-100%
	Skylark Contour	CTCL-153P	150W	20%-100%
	Toggler	TGCL-153P	150W	20%-100%
Leviton	Trimatron	6681	600W	20%-100%
	Sureslide	6672	150W	20%-100%