

One-Light Bath

 Wall mounted • Damp location listed **PROGRESS LED**

P300093-009-30

Description:

Architectural details and a full size canopy are key elements in Concourse LED vanity fixtures. A dual tone reflector frames the canopy to provide a mirror like effect. Etched opal glass is paired with Brushed Nickel and polished stainless accents in this versatile 24" cylindrical fixture.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched White Glass shade
- Architectural details and a full size canopy are key elements in Concourse LED vanity fixtures
- A versatile cylindrical design - installs in either horizontal or vertical orientation
- Brushed Nickel and polished stainless accents with etched opal glass
- One light 37W LED linear vanity
- Includes 37-watt integrated LED
- 2191 lumens (delivered)
- Warm white, 3000K, color temperature
- A dual tone reflector frames the canopy to provide a mirror like effect
- ADA compliant
- LED source offers energy and maintenance savings benefits
- California JA8 certified
- Dimmable with most Triac or ELV type dimmers
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	37w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	2191/60 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cETLus Damp location listed Meets California Title 24 JA8-2016

Images:



Dimensions:

Width: 24"
 Depth: 3-1/2"
 Height: 4-3/4"
 H/CTR: 2-3/8" (mounted horizontal)

Glass
 Width: 22-1/4"
 Height: 2-3/8"

Photometrics:

P300093-009-30

ELECTRICAL DATA	P300093-009-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.308 A
Input Power	37
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P300093-009-30


LED Light Engine: 3000 K 90 CRI
 System Wattage: 37
 Fixture delivered lumens: 2191
 Fixture Efficacy: 60
 Spacing Criteria:

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION					FLUX
	0.0	45.0	90.0	135.0	180.0	
0	249	249	249	249	249	
5	261	257	248	240	237	24
15	284	269	239	218	210	69
25	305	277	223	191	180	108
35	326	279	200	158	133	136
45	349	280	171	113	82	151
55	371	280	137	66	27	153
65	390	282	99	15	1	148
75	398	282	59	2	1	144
85	378	266	17	2	1	133
90	364	251	2	2	1	
95	379	268	18	2	1	134
105	404	290	62	2	1	147
115	404	292	105	15	1	154
125	385	293	145	64	27	159
135	365	294	182	112	79	157
145	342	294	209	159	135	141
155	321	293	204	192	180	110
165	301	284	174	214	211	66
175	203	189	154	161	122	17
180	83	140	165	143	87	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	200	9.3
0-40	336	15.6
0-60	640	29.8
0-90	1065	49.5
90-120	435	20.2
90-130	594	27.7
90-150	892	41.5
90-180	1085	50.5
0-180	2150	100.0

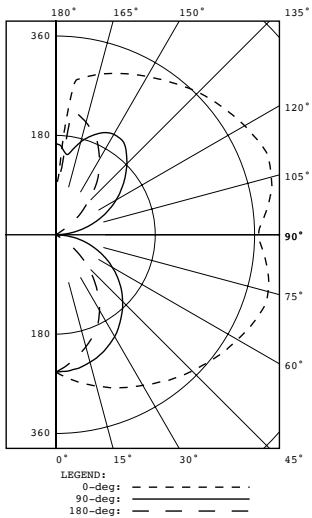

Test 17.02140 Test Date 08/04/17

P300093-009-30**Dimming Notes:**

P300093 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron - NTEVL-300

Lutron - DVELV-300P

Lutron - Caseta Wireless

Leviton – 6672

Leviton – 6674

Lutron - AYCL-153P

Lutron - AYLV-600P

Lutron - MAELV-601

Leviton - AWRMG-EAW

Lutron - N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.