

# One-Light Bath

 Wall mounted • Damp location listed **PROGRESS LED**

## P300094-009-30

### Description:

Architectural details and a full size canopy are key elements in Concourse LED vanity fixtures. A dual tone reflector frames the canopy to provide a mirror like effect. Etched opal glass is paired with Brushed Nickel and polished stainless accents in this versatile 36" cylindrical fixture.

### Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched White Glass shade
- Architectural details and a full size canopy are key elements in Concourse LED vanity fixtures
- A versatile cylindrical fixture
- Brushed Nickel and polished stainless accents with etched opal glass
- One light 53W LED linear vanity
- Includes 53-watt integrated LED
- 2969 lumens (delivered)
- Warm white, 3000K, color temperature
- A dual tone reflector frames the canopy to provide a mirror like effect
- ADA compliant
- LED source offers energy and maintenance savings benefits
- California JA8 certified
- Dimmable with most Triac or ELV type dimmers
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- Meets California Title 24 JA8-2016

### Performance:

Number of Modules	1
Input Power	53w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	2969/55.6 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cETLus Damp location listed Meets California Title 24 JA8-2016

### Images:



### Dimensions:

Width: 36"  
 Depth: 3-1/2"  
 Height: 4-3/4"  
 H/CTR: 2-3/8" (mounted horizontal)

Glass  
 Width: 32-1/4"  
 Height: 2-3/8"

## P300094-009-30

### Photometrics:

<b>ELECTRICAL DATA</b>	<b>P300094-009-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.442 A
Input Power	53
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

\*See Dimming Notes for more information

### P300094-009-30


LED Light Engine: 3000 K 90 CRI  
 System Wattage: 53  
 Fixture delivered lumens: 2969  
 Fixture Efficacy: 55.6  
 Spacing Criteria: 1.35

### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	354	
5	352	34
15	346	98
25	331	153
35	309	193
45	277	214
55	241	216
65	206	205
75	182	191
85	155	170
90	150	
95	159	174
105	182	192
115	203	201
125	235	211
135	270	209
145	303	190
155	327	151
165	342	97
175	349	33
180	350	

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	284	9.7
0-40	477	16.3
0-60	907	30.9
0-90	1474	50.3
90-120	567	19.4
90-130	778	26.5
90-150	1176	40.1
90-180	1457	49.7
0-180	2932	100.0

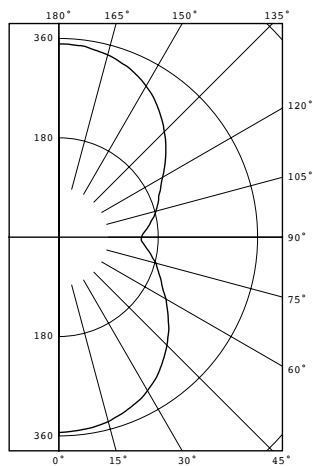

Test 17.02756 Test Date 10/09/17

**P300094-009-30****Dimming Notes:**

---

P300094 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron - NTEVL-300

Lutron - DVELV-300P

Lutron - Caseta Wireless

Leviton – 6672

Leviton – 6674

Lutron - AYCL-153P

Lutron - AYLV-600P

Lutron - MAELV-601

Leviton - AWRMG-EAW

Lutron - N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.