

P730006 2-LGT LED MED ROUND CLOUD

Ceiling mounted • Damp location listed



Description:

LED close to ceiling with white contoured acrylic clouds that float off the ceiling. Twist on installation. Wall or ceiling mount. 1845 lumens, 82 lumens/watt, 3000K and 90CRI. ENERGY STAR and Title 24.

Specifications:

- White (-030) (Painted)
- Steel Construction
- White Acrylic diffuser
- Twist on installation.
- Wall or ceiling mount
- 1845 lumens, 82/lumens per watt
- 3000K color temperature, 90+ CRI
- Damp location listed
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

| | |
|---------------------|--|
| Number of Modules | 1 |
| Input Power | 22.5w |
| Input Voltage | 120 V |
| Input Frequency | 60 Hz |
| Lumens/LPW | 1845/82 (LM-79) |
| CCT | 3000 K |
| CRI | 90 CRI |
| Life (hours) | 36,000 (L70/TM-21) |
| EMI/RFI | FCC Title 47, Part 15 Class B |
| Min. Start Temp | -30 °C |
| Max. Operating Temp | 30°C |
| Warranty | 5 year warranty |
| Labels | ETL Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016 |

P730006-030-30


Images:



Dimensions:

Diameter: 13-5/8"

Height: 4-1/8"

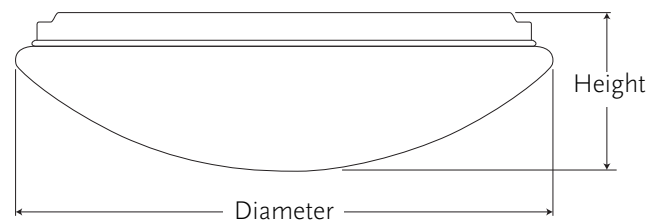

P730006-030-30

Dimming Notes:

P730006 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron DVCL-253P

Lutron Caseta Wireless

Lutron TGCL-153-PH

Lutron AYCL-153P

Lutron NTLV-600

Leviton 6674

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.