



# CEILING LIGHT

FM-3  
08/12

**QUESTIONS OR CONCERNS CONTACT CANARM AT:**  
1-800-265-1833 (English) / 1-800-567-2513 (French)  
Monday through Friday 8:00 AM to 5:00 PM E.S.T.

### TOOLS AND MATERIALS REQUIRED:



Phillips  
Screwdriver



Wire Cutters

Wiring supplies  
as required by  
electrical code



Pliers




Wrench



Blade  
Screwdriver

"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"  
"READ ALL INSTRUCTIONS"



**"IMPORTANT SAFETY INSTRUCTIONS"**  
**"SAVE THESE INSTRUCTIONS"**


### SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CAUTION – RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
4. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.
5. CLEAN GLASS WITH WATER ONLY.

**NOTE: Product May Not Look Exactly As Shown In Figures.**


**Note:** Your fixture may have either one or two sockets depending on the model.

### INSTALLATION:

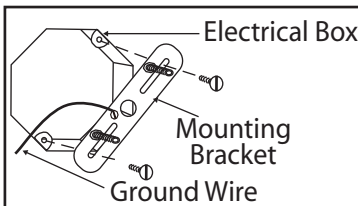


**NOTE:** Product may not look exactly as shown in diagrams.


1. Attach mounting bracket to electrical box with electrical box screws (not included).

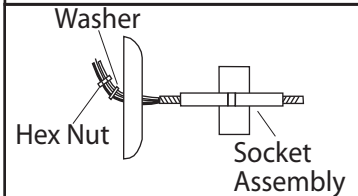


2. Attach the socket assembly to the canopy with a washer and a hex nut.

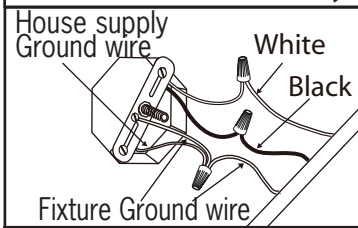

3. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Attach the black wire (or wire marked "SPT-1") from the light fixture to the black wire in the electrical box. Attach the white wire from the light fixture to the white wire in the electrical box. Once connections of wires are completed, carefully tuck wires and wire nuts into the outlet box making sure no bare wire (on the black and white) is visible at the wire nuts.

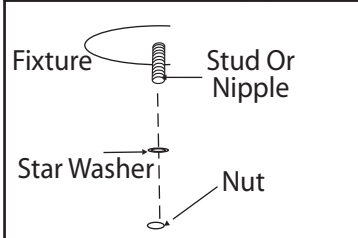

4. Tuck electrical wires into outlet box and position fixture over studs or nipple on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).

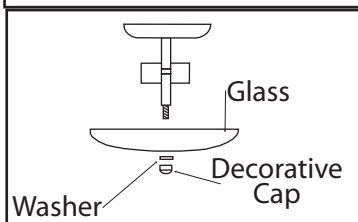

5. Install proper bulb type and wattage (not included).

6. Secure the glass in place using the decorative cap and washer (may not be included on some models.)