© 2023 Kichler Lighting LLC. All Rights Reserved.

MOTOR FINISH



BLADE FINISHES

Matte White, Matte White



Dimmable



AR PERFORMANCE

AIRFLOW Cubic Ft. Per Minute on High

4594

RPM Revolutions Per Minute on High

135

POWER USAGE Watts on High (Excludes Lights)

58

AIRFLOW EFFICIENCY Cubic Ft. Per Minute Per Watt

79

SPECIFICATIONS

Performance			
CFM (High) Watts (High)	4594 58	RPM (High) Airflow Efficiency CFM/W (High)	135 79
Motor Specifications			
Amps (High) Motor Type	0.46 AC Induction	Motor Size Primary Material	153MM X 17MM Steel
Mounting/Installation			
Minimum Distance from Fan to Floor Lead Wire Length Low Ceiling Adaptable	7 feet 78" No	Interior/Exterior Location Rating Max Stem Tilt	Interior CSA UL Listed Dry 18.00
Dimensions			
Downrod 1 Downrod 1 - Measurement B Base Backplate Blade Sweep Width	1.00 OD X 4.50" 9.50" 5.25" DIA 52 52.00"	Downrod 1 - Measurement A Downrod 1 - Measurement C Weight Height	13.75" 10.50" 16.39 LBS 13.75"
Light Source			
Downlight Included Dimmable Kelvin Temperature Lumens/watt (efficacy) Downward-facing Bulbs # of Bulbs/LED Modules	Yes Yes 3000K 94.00 X17W	Downlight Option Color Rendering Index Initial Lumens Diffuser Description Lamp Included	Integrated 80 1600 Etched Cased Opal Integrated
Photometrics			
Color Temperature Range	3000	Delivered Efficacy (Lumens/Watt)	94

FIXTURE ATTRIBUTES


Blade Finish & Specs Blade Finish 1 Matte White Blade Finish 2 Matte White Blade Material Wood Blade Pitch 12 Blades Included Yes Blades Reversible Yes 5 Number of Blades **Included Control** Wall Control Included No Remote Included No **Product/Ordering Information** SKU 330174MWH Finish Matte White **UPC** 783927471565 Style Transitional Housing Fan Primary Control System Pull Chain

Warranty

www.kichler.com/warranty

Compatible Accessories

CoolTouch™ Handheld Control System Limited Function White, Universal Fan Remote Control White, Wall Control System Limited Function Multiple Finishes

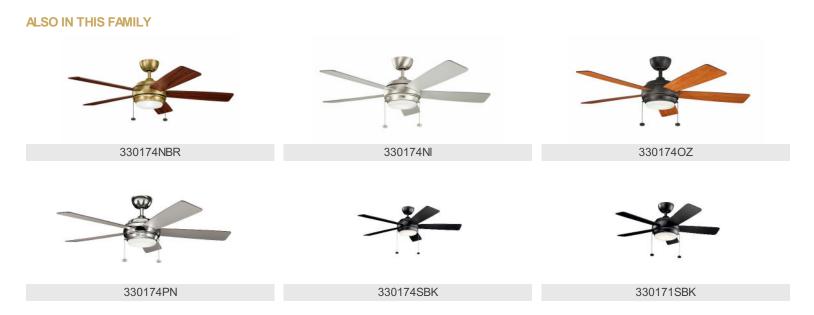

You can see all products in this family by searching **Kichler.com**