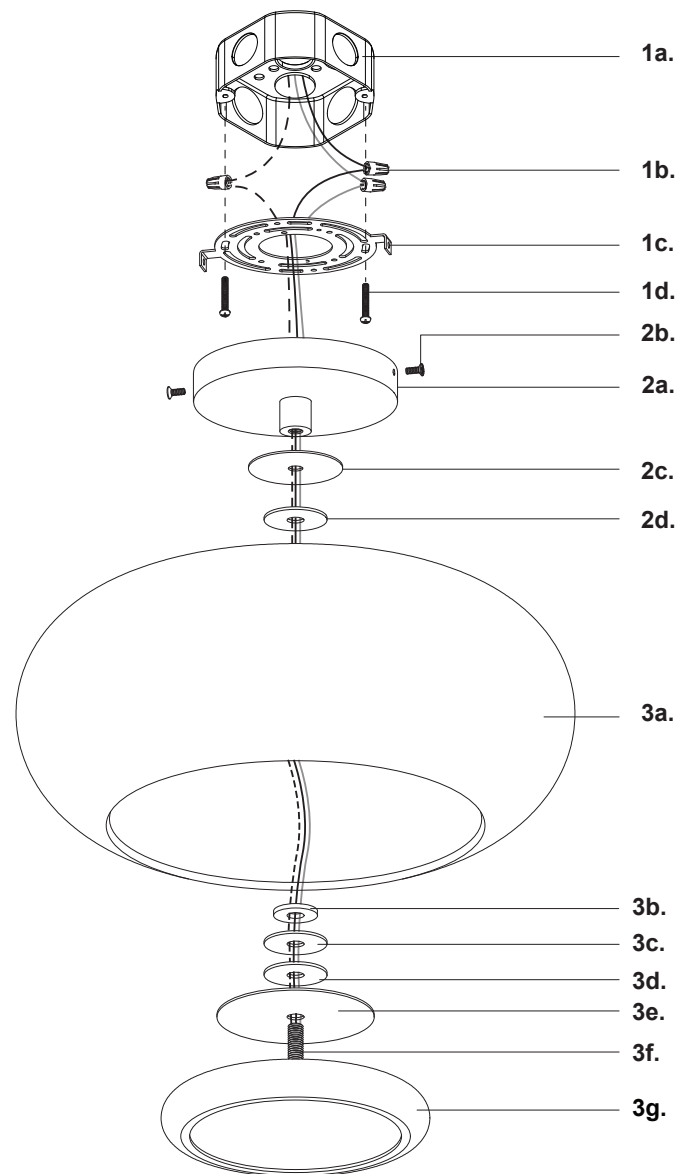# LED Semi Flush Mount

START FROM HERE

• Make sure **POWER** is **COMPLETELY OFF** at the fuse box
• Have your fixture installed by a qualified licensed electrician
• Prepare everything in a clear area
• Wear gloves at all time during this installation
• Read instructions carefully before you start assembly
• Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

Please Note:
• This Kuzco LED fixture comes with pre-wired LED module(s)
• Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
• Use ELV (Electronic Low Voltage) type of dimmer for dimming application
• 120V input

1. Remove fixture from its original package

2. Separate mounting plate **(1c)** from canopy **(2a)** by removing canopy screws **(2b)**

3. Attach mounting plate **(1c)** to electrical junction box **(1a)** using junction box screws provided **(1d)** in hardware package

4. Run the wires through the cover washer **(3e)**, medium steel washer **(3d)**, plastic washer **(3c)**, small steel washer **(3b)**, glass shade **(3a)** and let glass shade **(3a)** rest on LED module **(3g)**. Place plastic washer **(2d)**, followed by steel washer **(2c)** through LED connector **(3f)**. Run wire through all components

5. Attach canopy **(2a)** to LED connector **(3f)** by threading clockwise

6. Make proper electrical connections (**black** to **hot** "L", **white** to **neutral** "N", **ground** to **"GND")** with wire nuts **(1b)** provided in hardware package

7. Attach canopy **(2a)** to mounting plate **(1c)** with canopy screws **(2b)**

1a.
1b.
1c.
1d.
2b.
2a.
2c.
2d.
3a.
3b.
3c.
3d.
3e.
3f.
3g.