



Verona

4 in 1 VERONA
ARCHITECTURAL ROUND LIGHT

LUMINAIRE
Galarneau



UGR<19 Lighting
Visual Comfort & Healthy


Diameter Up to **47"** With
14000LM
Delivered Lumens




5 years Warranty



Flexible and Easy
Installation

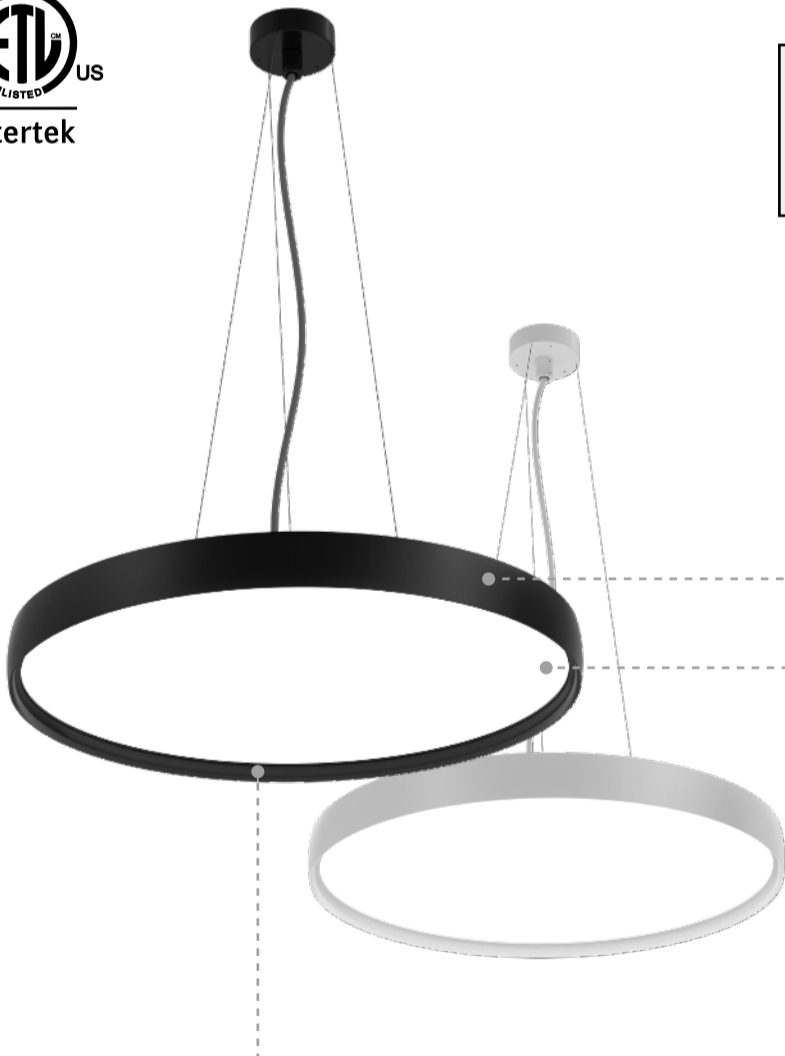

Aircraft Pendant




Rod Pendant




Ceiling, Wall Mounted

70% Direct / 30% Indirect lighting distribution, High efficacy up to 120LM/W. Flicker free.


Direct light uses microprismatic diffuser to realize anti-glare and visual comfort effect. UGR<19.

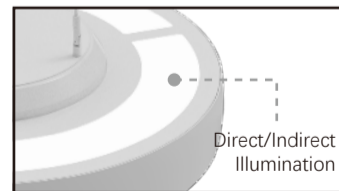


Direct/Indirect Illumination



Indirect Light
Switchable On or Off

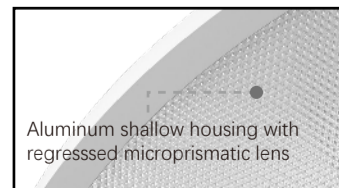

Aluminum shallow housing with regressed microprismatic lens



CCT Selectable

Excellent power coating surface treatment. Support bespoke colors.



EXPERIENCE VERONA ROUND LIGHT

The Verona aircraft able pedant mounted will create an effect that will enhance the assthetic of any space, and it features a minimalist, modern design and is best suited for office, lobbies, retail, school, libraries, and themed spaces.


LUMINAIRE
Galarneau

Application Areas

For open space office, private office, meeting room, lobbies, retail, schools, libraries, and themed spaces, hospitality, etc.



OPEN OFFICE

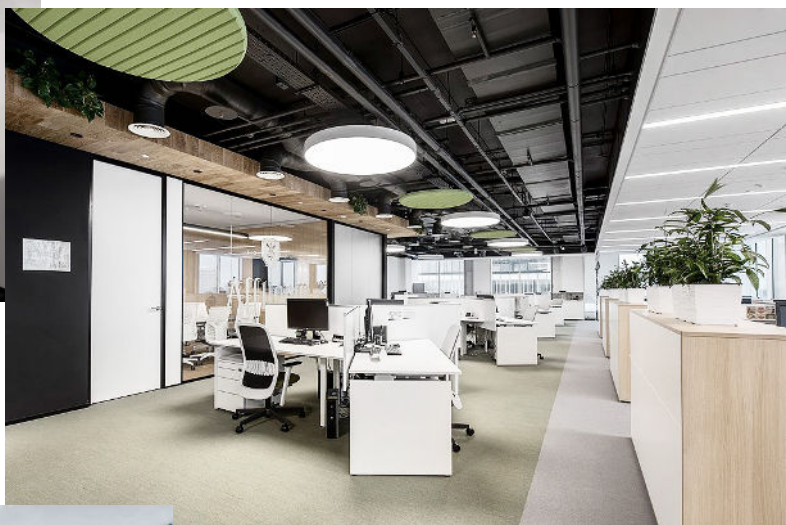


RECREATION SPACE





LOBBY

Technical Data

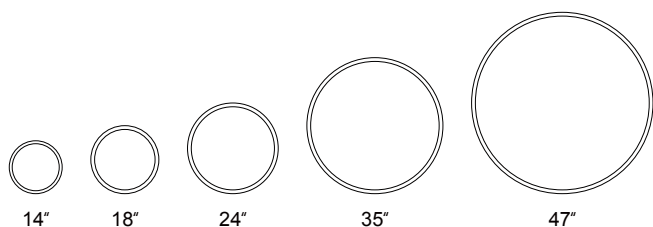

Available size (inch)

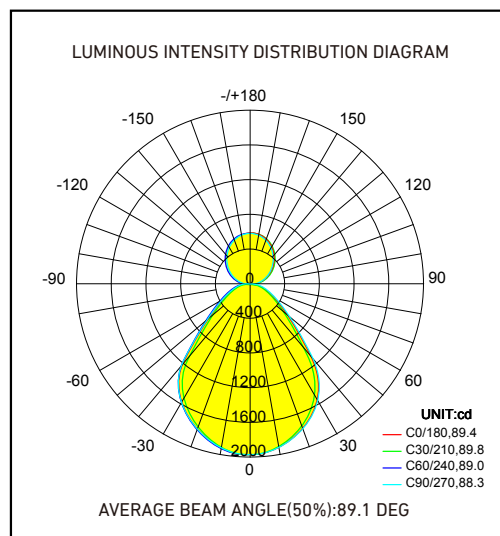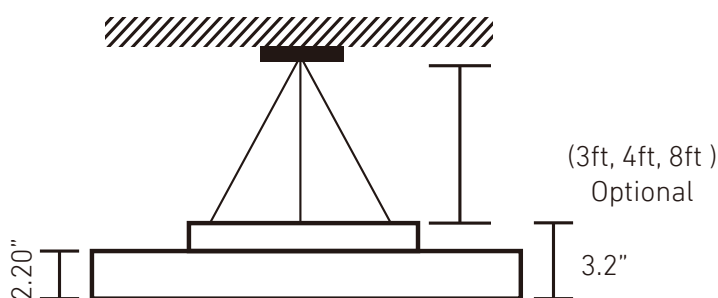

Parameter List

Light Distribution	Direct								
Diameter	14"	18"			24"	35"		47"	
Item No.	VER-DR035023-CTK	VER-DR045028-CTK	VER-DR045040-CTK	VER-DR060048-CTK	VER-DR060062-CTK	VER-DR090080-CTK	VER-DR090100-CTK	VER-DR120108-CTK	VER-DR120132-CTK
CCT Selectable	3000K/3500K/4000K								
Input Power	23W	28W	40W	48W	62W	80W	100W	108W	132W
Lumen Output(±10%)	1800lm	2500lm	3600lm	4700lm	6100lm	8100lm	10350lm	11700lm	14400lm
Efficacy	70-80lm/W	80-90lm/W	80-90lm/W	90-100lm/W	90-100lm/W	95-105lm/W	95-105lm/W	105-115lm/W	105-115lm/W
Light Distribution	Direct/Indirect								
Item No.	VER-ID035028-CTK	VER-ID045040-CTK	VER-ID045050-CTK	VER-ID060054-CTK	VER-ID060062-CTK	VER-ID090100-CTK	VER-ID090123-CTK	VER-ID120114-CTK	VER-ID120132-CTK
CCT Selectable	3000K/3500K/4000K								
Input Power	28W	40W	50W	54W	62W	100W	123W	114W	132W
Lumen Output(±10%)	↑600lm+ ↓1600lm	↑1100lm+ ↓2500lm	↑1350lm+ ↓3150lm	↑1600lm+ ↓3800lm	↑1800lm+ ↓4300lm	↑3150lm+ ↓7200lm	↑3800lm+ ↓9000lm	↑3600lm+ ↓8600lm	↑4200lm+ ↓9900lm
Efficacy	70-80lm/W	80-90lm/W	80-90lm/W	90-100lm/W	90-100lm/W	95-105lm/W	95-105lm/W	105-115lm/W	105-115lm/W
Input Voltage	120-277VAC								
Power Factor	≥0.9								
UGR	<19								
CRI	>90								
CCT	CCT Selectable 3000K/3500K/4000K								
Dimming	0-10V Dimmable								
Beam Angle	120°↑/ 90°↓								
Life Time	L80(B10)>50,000HRS								
Finish	RAL9016 White, RAL9005 Black, Powder Coating, or RAL9006 Silver Customized								
Warranty	5 Years								