

FEATURES:

- Heavy Gauge Steel Housing.
- Finish is high reflectance baked white enamel.
- Wiring knockouts are provided on back and end of housing.
- Polycarbonate lens and end cap, high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming.
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Power factor: >0.98.
- Quick disconnects between housing .
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- Damp location.
- UL/cUL us listed.
- DLC pending & CCT tunable version optional
- Ambient Temperature:-30 ~ 40 °C(-22° F to +104° F)
- Damp Location Rated



APPLICATIONS:

Warehouses/Office
Retail /Hallways
Utility areas



Ordering information

Item	Watts	3 CCT	Efficacy	Lumens	Dimension(L*W*H):Inch		
MX453ALM02012BVKDXW	20W	35K 40K 50K	120lm/w~ 135lm/w	2,400lm~ 2,700lm	23.4	2.36	3.34
MX453ALM03214BVKDXW	32W	35K 40K 50K	120lm/w~ 135lm/w	3,840lm~ 4,320lm	45.86	2.36	3.34
MX453ALM06018BVKDXW	60W	35K 40K 50K	120lm/w~ 135lm/w	7,200lm~ 8,100lm	90.75	2.36	3.34

ORDERING

Model	Color of Lens	Watts	Length	Mounting Method	CCT	Driver	Accessories
MX453A	LM-Milky lens	020: 20W	12-2ft	B: Surface/	30:3000K	D1:120/277V	A: No sensor&EM
	LD-Clear lens	032: 32W	14-4ft	Suspended	35:3500K	D2:347V	B: With Sensor
	LX-No lens	080: 60W	18-8ft	W: Wall	40:4000K	D3:120-347V	C: With EM
	LW-Wire cage			R: Recessed	45:4500K	D4:480V	D: With
					50:5000K	D5:347-480V	Sensor&EM
					VK-CCT tunable		


CCT Tunable



3000K/3500K-Warm White


4000K-Nature White

5000K-Cold White

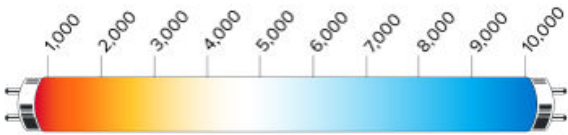

PHOTOMETRIC




Luminous Intensity Distribution Curve

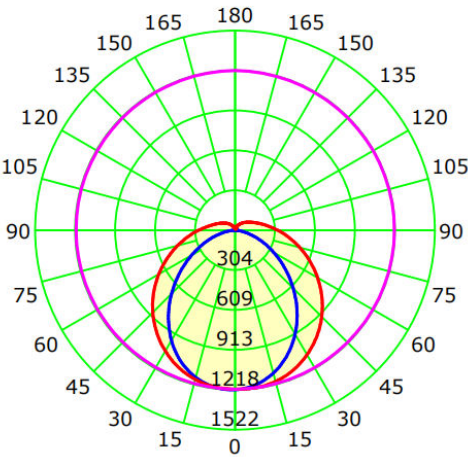


Luminaire	4000K
Input Voltage(VAC)	120-277
Power (W)	30.46
Delivered Lumen(Lm)	4304.5
Efficacy(Lm/W)	135
Beam Angle	H94.6 V132.5
Power Factor(PF)	>92
Color Rendering Index(CRI)	>82

INSTALLATION

Note: Quick Surface Mount
within 30seconds

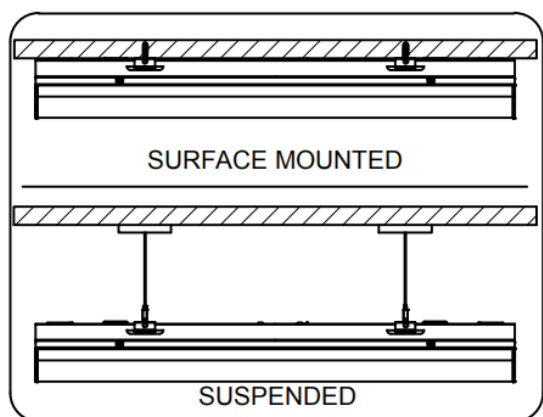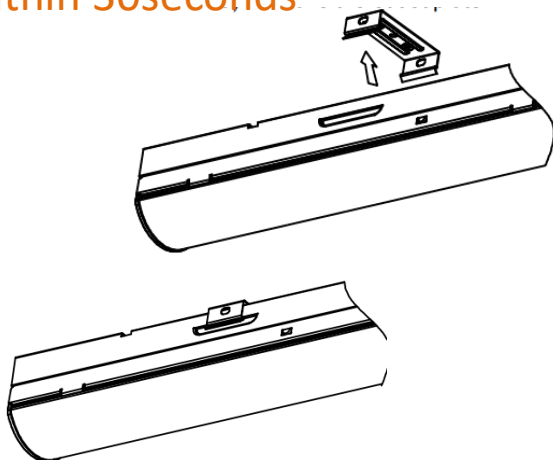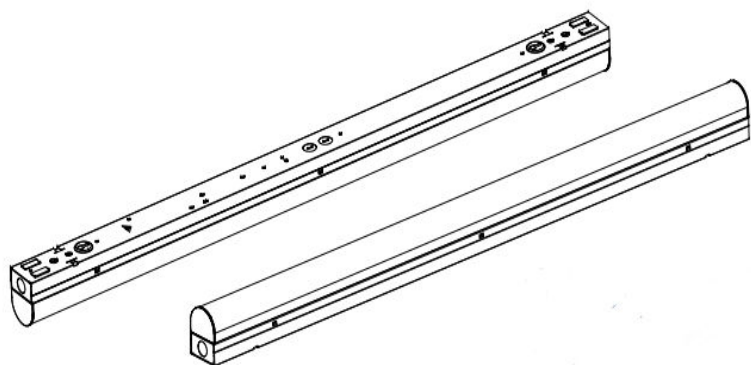


■ Installation Dimension

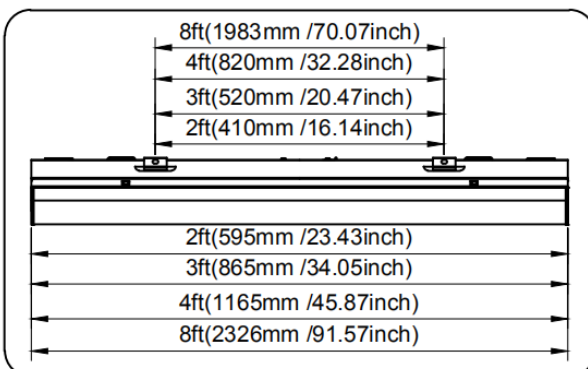

Accessories to be added separated

1. Sensor & Emergency kit

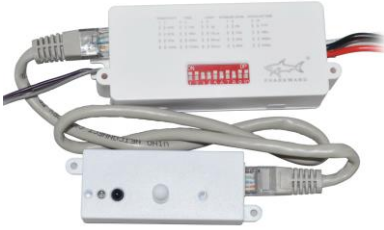

Internal Microwave
Motion Sensor BRI810-
B-M4




(No Shadow)



BLD-CM20E-4800800
Lithium Battery

2. Connection plate

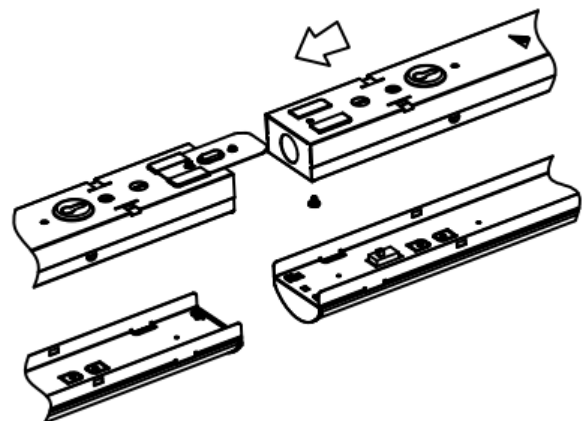


Accessories to be added separated

3. Junction box cover



Note: If this is needed please tell your representative as standard fixture will not have mounting hole for this cover

4. Reflector

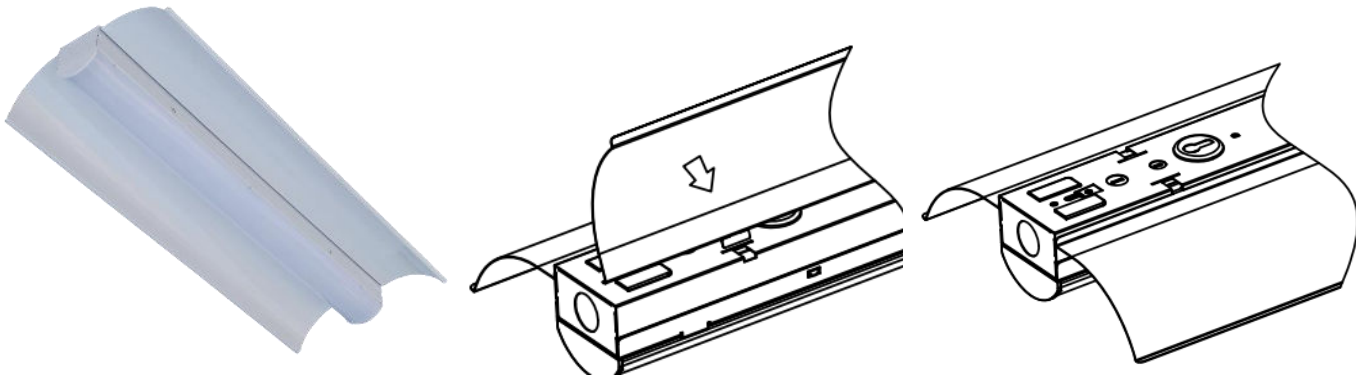

5. Wire cage

