

LED SIGNAGE BACK LIGHTING



Features

- High lumen performance
- Low voltage-constant current 12 VDC system
- Wide viewing angle and helps eliminate wasted light
- Pre-drilled holes and industrial-grade mounting tape
- Contains no lead, mercury or glass
- 5- years warranty
- Dimming is not supported

Application


- 5-15cm signage lighting
- 5-15cm large channel letters

LED SIGNAGE BACK LIGHTING

Specifications


Part No.	BV-KPT8-S-2	BV-KPT8-S-3	BV-KPT8-S-4
Input Vol.	12VDC	12VDC	12VDC
Power/pc	0.72W	1.02W	1.32W
Lumen/pc	65lm	93lm	104-110lm
Led Type	SMD 2835	SMD 2835	SMD 2835
CRI	≥80	≥80	≥80
Max QTY/serie	50pcs	50pcs	50pcs
Dimension (LxWxD)	38.8x19.3x10.5mm	60.8x19.3x10.5mm	40x40x10.9mm

Color Available

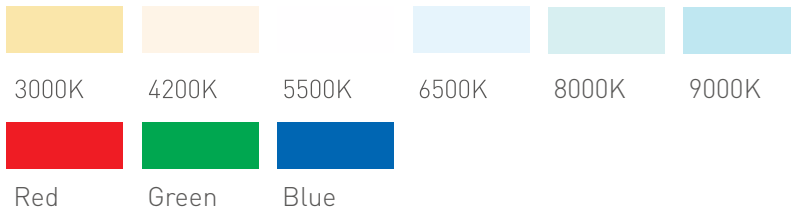


Dimension


Unit:mm[in]

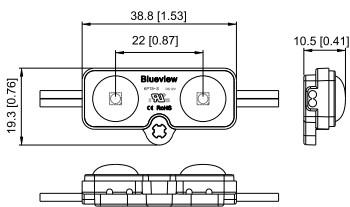

BV-KPT8-S-2

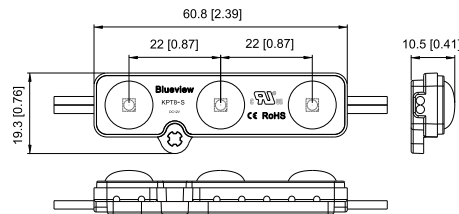

BV-KPT8-S-3

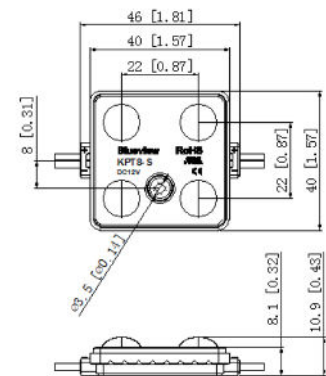


BV-KPT8-S-4

Note: Dimension tolerance: length ±0.2mm; width ±0.2mm; height ±0.2mm.

LED SIGNAGE BACK LIGHTING

Luminous Intensity Distribution Diagram

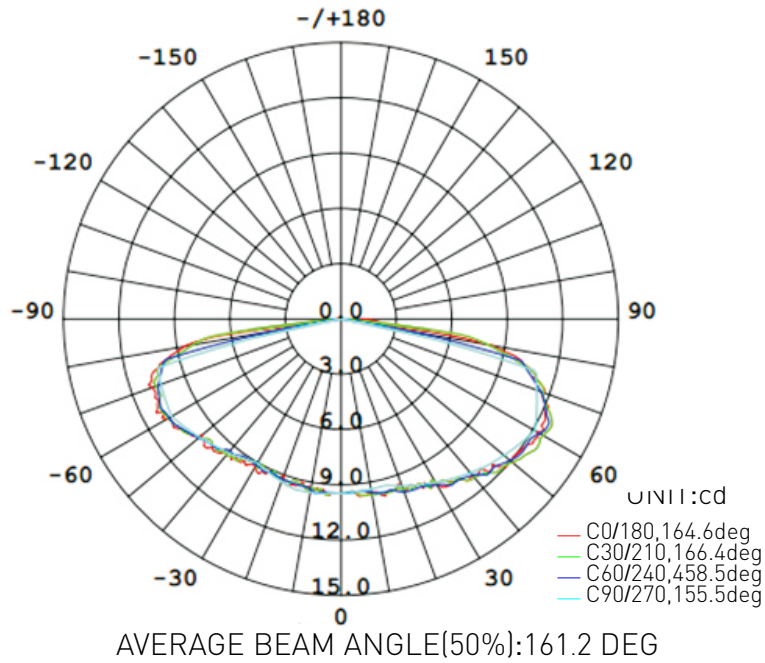

Installation

Thickness	Distance(x,y)	Qty/m ²	Illumination
7cm	11x8cm	8x9pcs	6370-8630Lux
10cm	15x6cm	6x12pcs	4770-5850Lux
12cm	15x6cm	6x12pcs	3560-4840Lux
15cm	13x6cm	7x12pcs	3810-4830Lux
18cm	11x8cm	8x9pcs	3450-4590Lux