12V EXTERNAL MLV DIMMER 9000-MLV-BK





Model

9000-MLV-BK


SPECIFICATIONS


Operating Temp:

Mounting:

Finish:

Standards:





Fixture Type:


Catalog Number:

Project:

Location:

FINISHES


BLACK



Single-gang deep junction box required (Sold Separately)

DIMMER SPECS

Wattage	150W
Operating Range	12-15 VAC
Capacity	13 Amps
Minimum Load	None
IP	63
UL/ETL	YES

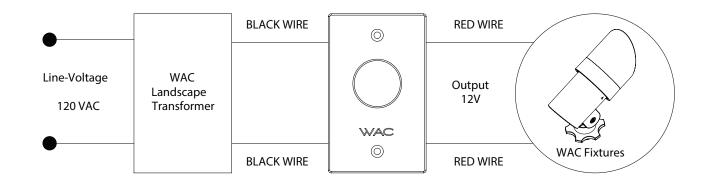

waclighting.com Headquarters, East Manufacturing Facility Phone (800) 526.2588 44 Harbor Park Drive (800) 526.2585 Fax Port Washington, NY 11050

Installs in single-gang deep junction box on the low-

voltage side of magnetic step-down transformer Includes: Dimmer Plate; Gasket; Wire Nuts; Mounting

Screws; Instruction Sheet Black in Aluminum

-4°F to 104°F (-20°C to 40°C)

NOTE: Dimmer range may vary depending upon load that is applied.

ETL & cETL

South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122

Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104

West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761