

# WAC LIGHTING

## Bastone

Bath & Wall 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-99426 26"	2700K	BK Black	23 W	2245	924
	3000K	BN Brushed Nickel	23 W	2245	924
	3500K		23 W	2245	924
	4000K		23 W	2245	924

Example: **WS-99426-40-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

A simple rectangle radiates from LED illumination. This seamless design presents a sharp visual style.

### FEATURES


- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

### SPECIFICATIONS


Color Temp:	4000K,3500K,2700K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Die cast aluminum body with frosted acrylic diffuser



### FINISHES:



### LINE DRAWING:

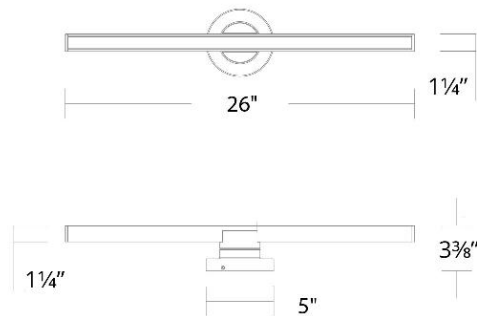

WS-99426

# WAC LIGHTING

## Bastone

Bath & Wall 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-99436 36"	2700K	BK Black	26 W	2783	1078
	3000K	BN Brushed Nickel	26 W	2783	1078
	3500K		26 W	2783	1078
	4000K		26 W	2783	1078

Example: **WS-99436-40-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

A simple rectangle radiates from LED illumination. This seamless design presents a sharp visual style.

### FEATURES


- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

### SPECIFICATIONS


Color Temp:	2700K,3500K,4000K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Die cast aluminum body with frosted acrylic diffuser



### FINISHES:



### LINE DRAWING:

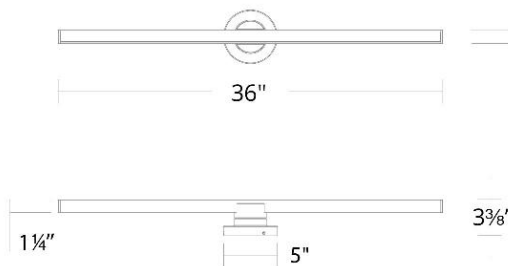

WS-99436