

# WAC LIGHTING

## Ice Cube

### Round Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29303R 8" - 3 Lights	2 700K/3000K/3500K/4000K 90	21 W	1130	AB Aged Brass BK Black

Example: **PD-29303R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

#### FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser

#### REPLACEMENT PARTS


RPL-GLA-29308 - PD-29308 Crystal



#### FINISHES:



#### LINE DRAWING:

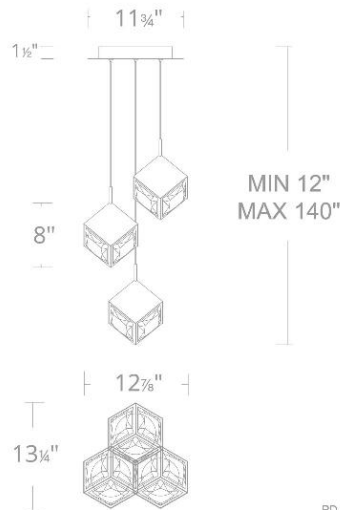

# WAC LIGHTING

## Ice Cube

### Round Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29305R 8" - 5 Lights	2 700K/3000K/3500K/4000K 90	36 W	1930	AB Aged Brass BK Black

Example: **PD-29305R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

#### FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser

#### REPLACEMENT PARTS

RPL-GLA-29308 - PD-29308 Crystal




#### FINISHES:



Black      Aged Brass

#### LINE DRAWING:

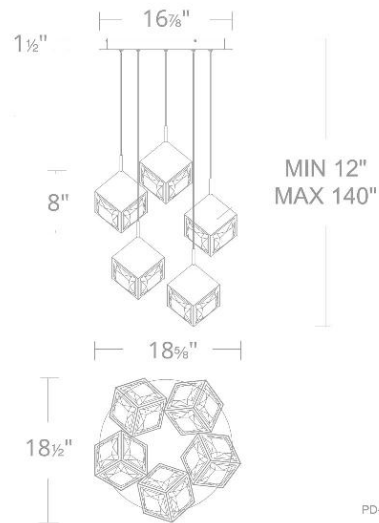

PD-29305R

# WAC LIGHTING

## Ice Cube

### Round Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29309R 8" - 9 Lights	2 700K/3000K/3500K/4000K 90	65 W	3515	AB Aged Brass BK Black

Example: **PD-29309R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

#### FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 9, 15 & 21 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser



#### FINISHES:



#### LINE DRAWING:

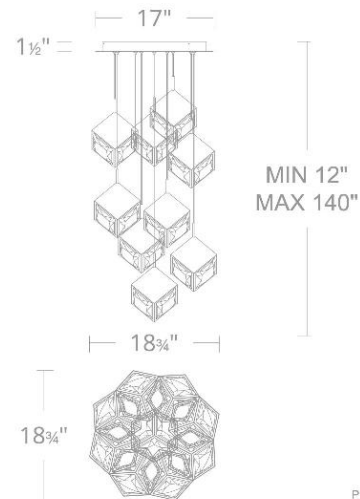

PD-29309R

# WAC LIGHTING

## Ice Cube

### Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29315R 8" - 15 Lights	2 700K/3000K/3500K/4000K 90	108 W	5780	AB Aged Brass BK Black

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **PD-29315R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

#### FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 9, 15 & 21 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser



#### FINISHES:



#### LINE DRAWING:

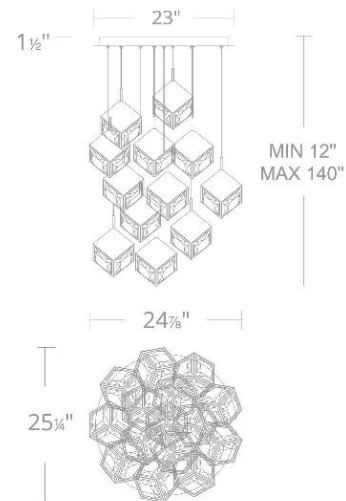

PD-29315R

# WAC LIGHTING

## Ice Cube

### Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29321R 8" - 21 Lights	2 700K/3000K/3500K/4000K 90	150 W	8060	AB Aged Brass BK Black

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **PD-29321R-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

#### FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 9, 15 & 21 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser



#### FINISHES:



#### LINE DRAWING:

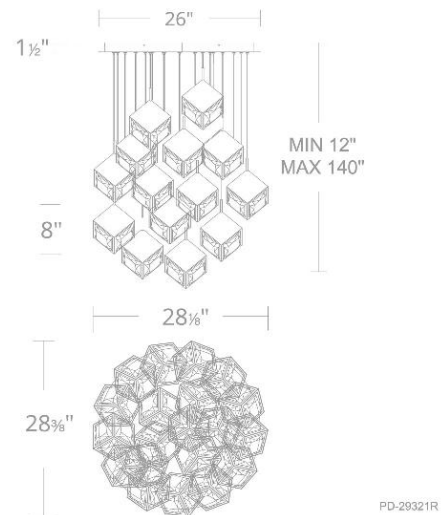

#### REPLACEMENT PARTS

RPL-GLA-29308 - PD-29308 Crystal