

# WAC LIGHTING

## Interlace

### Square Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47813S 21" - 13 Lights	2 700K/3000K/3500K/4000K 90	279 W	12577	BK Black CH Chrome

Example: **PD-47813S-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser



#### FINISHES:



#### LINE DRAWING:

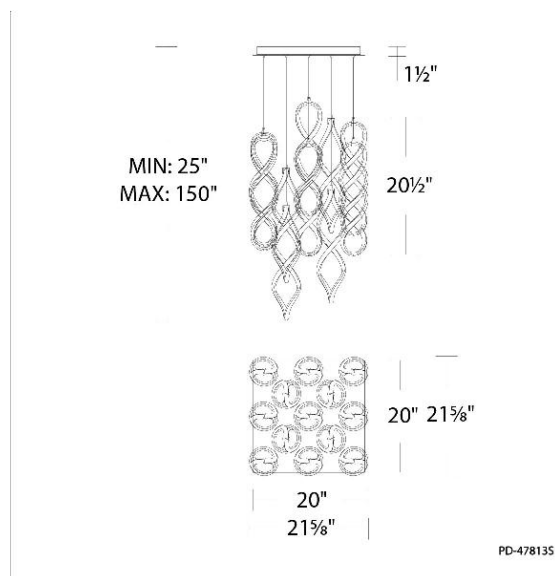

# WAC LIGHTING

## Interlace

### Square Multi Light 4CCT

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47825S 21" - 25 Lights	2 700K/3000K/3500K/4000K 90	536 W	24186	BK Black CH Chrome

Example: **PD-47825S-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




#### FINISHES:



Chrome Black

#### LINE DRAWING:

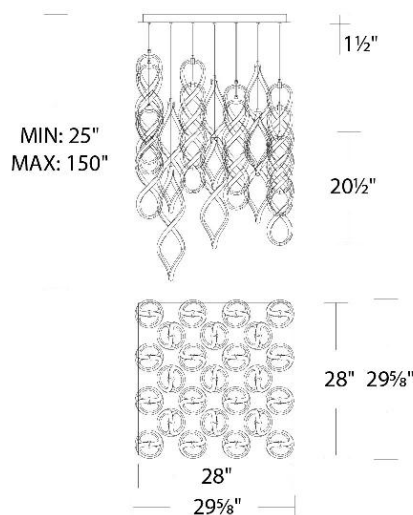

PD-47825S

# WAC LIGHTING

## Interlace

### Square Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47841S 21" - 41 Lights	2 700K/3000K/3500K/4000K 90	878 W	39665	BK Black CH Chrome

Example: **PD-47841S-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser



#### FINISHES:



#### LINE DRAWING:

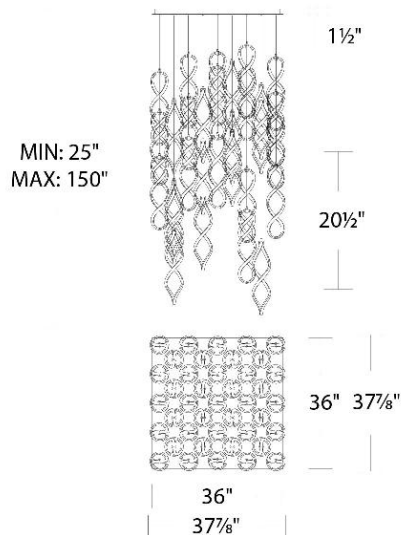

PD-47841S