

WAC LIGHTING

Interlace

Round Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47803R 21" - 3 Lights	2 700K/3000K/3500K/4000K 90	64 W	2902	BK Black CH Chrome

Example: **PD-47803R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




FINISHES:



Chrome Black

LINE DRAWING:

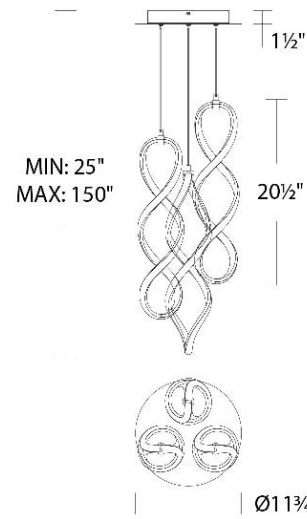

PD-47803R

WAC LIGHTING

Interlace

Round Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47805R 21" - 5 Lights	2 700K/3000K/3500K/4000K 90	107 W	4837	BK Black CH Chrome

Example: **PD-47805R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser



FINISHES:



LINE DRAWING:

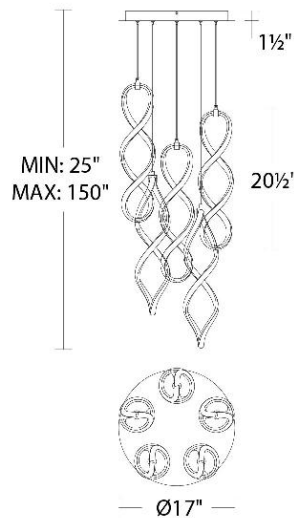

PD-47805R

WAC LIGHTING

Interlace

Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47809R 21" - 9 Lights	2 700K/3000K/3500K/4000K 90	193 W	8707	BK Black CH Chrome

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Example: **PD-47809R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser



FINISHES:



LINE DRAWING:

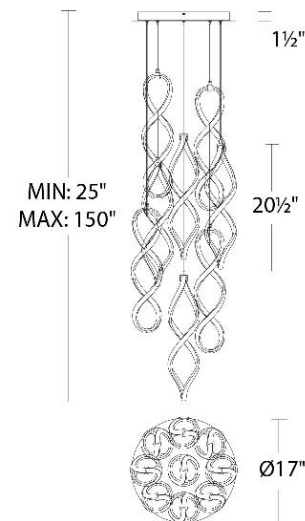

PD-47809R

WAC LIGHTING

Interlace

Round Multi Light 4CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47815R 21" - 15 Lights	2 700K/3000K/3500K/4000K 90	321 W	14511	BK Black CH Chrome

Example: **PD-47815R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser



FINISHES:



LINE DRAWING:

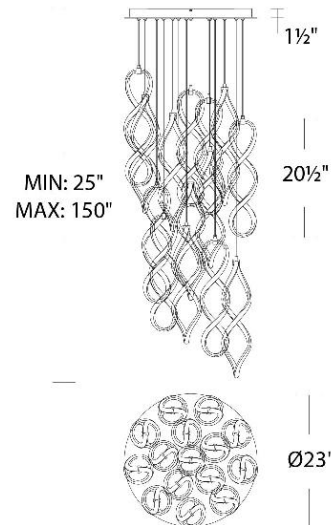

PD-47815R

WAC LIGHTING

Interlace

Round Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47821R 21" - 21 Lights	2 700K/3000K/3500K/4000K 90	450 W	20316	BK Black CH Chrome

Example: **PD-47821R-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser



FINISHES:



Chrome

Black

LINE DRAWING:

