

# WAC LIGHTING

## Peekaboo

Bath & Wall 3000K

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-83422 22"	2700K/3000K/3500K/4000K	BK/AB Black/Aged Brass	20 W	1006	833
		BK/BN Black/Brushed Nickel		1765	1272

Example: **WS-83422-BK/BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Plane geometry. This layered design features a sleek, illuminated rectangle punctuated by an opaque square, bringing substance to style.

### FEATURES

- Diffused omnidirectional illumination
- Interchangeable center plate, choose from aged brass or brushed nickel
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy




### SPECIFICATIONS

<b>Color Temp:</b>	2700K/3000K/3500K/4000K
<b>Input:</b>	120/277V,50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-10% ,TRIAC: 100-5%
<b>Rated Life:</b>	50000 Hours
<b>Mounting:</b>	Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum body, with acrylic diffuser

### FINISHES:

Black/Brushed Nickel    Black/Aged Brass

### LINE DRAWING:

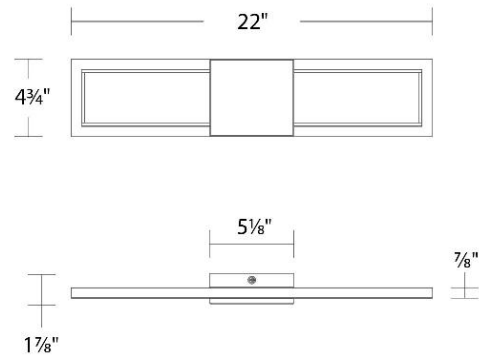

WS-83422

# WAC LIGHTING

## Peekaboo

Bath & Wall 3000K

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-83432 32"	2700K/3000K/3500K/4000K	BK/AB Black/Aged Brass BK/BN Black/Brushed Nickel	20 W	1006 1765	833 1272

Example: **WS-83432-BK/BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Plane geometry. This layered design features a sleek, illuminated rectangle punctuated by an opaque square, bringing substance to style.

### FEATURES

- Diffused omnidirectional illumination
- Interchangeable center plate, choose from aged brass or brushed nickel
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy




### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, with acrylic diffuser

### FINISHES:

Black/Brushed Nickel    Black/Aged Brass

### LINE DRAWING:

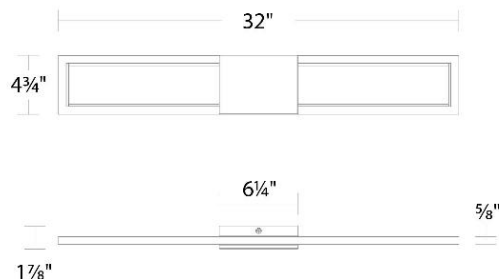

WS-83432