

# WAC LIGHTING

## Quill

### Linear Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59403L 16" - 3 Lights	2 700K/3000K/3500K/4000K 90	24 W	1558	AB Aged Brass BK Black CH Chrome

Example: **PD-59403L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




#### FINISHES:

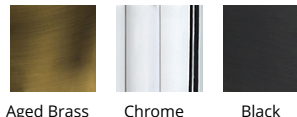

Aged Brass Chrome Black

#### LINE DRAWING:

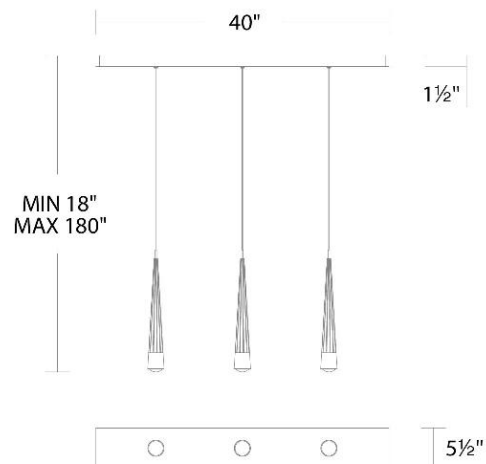

PD-59403L

# WAC LIGHTING

## Quill

### Linear Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59405L 16" - 5 Lights	2 700K/3000K/3500K/4000K 90	40 W	2597	AB Aged Brass BK Black CH Chrome

Example: **PD-59405L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




#### FINISHES:



Aged Brass    Chrome    Black

#### LINE DRAWING:

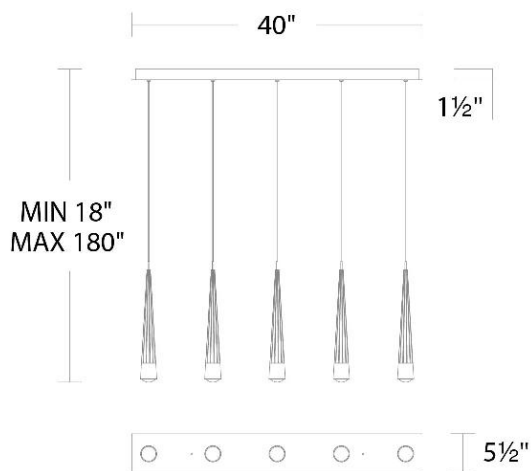

PD-59405L

# WAC LIGHTING

## Quill

### Linear Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59414L 16" - 14 Lights	2 700K/3000K/3500K/4000K 90	112 W	7270	AB Aged Brass BK Black CH Chrome

Example: **PD-59414L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




#### FINISHES:



Aged Brass Chrome Black

#### LINE DRAWING:

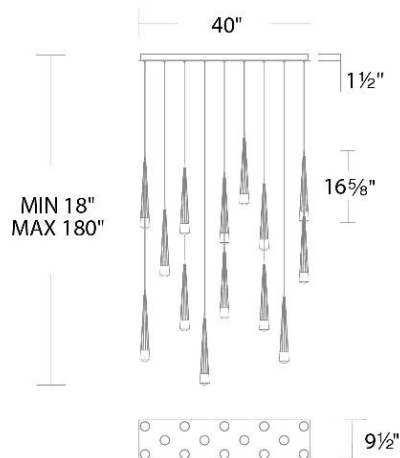

PD-59414L

# WAC LIGHTING

## Quill

### Linear Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59423L 16" - 23 Lights	2 700K/3000K/3500K/4000K 90	184 W	11944	AB Aged Brass BK Black CH Chrome

Example: **PD-59423L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 23 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body



#### FINISHES:

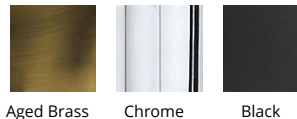

Aged Brass Chrome Black

#### LINE DRAWING:

