

# WAC LIGHTING

## Quill

### Square Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59413S 16" - 13 Lights	2 700K/3000K/3500K/4000K 90	104 W	6751	AB Aged Brass BK Black CH Chrome

Example: **PD-59413S-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body



#### FINISHES:



#### LINE DRAWING:

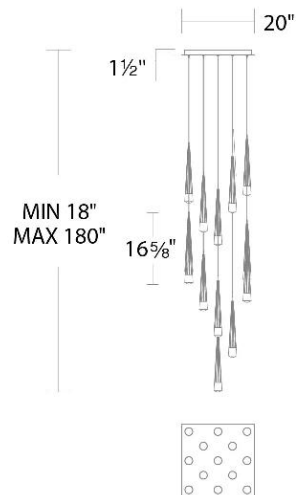

PD-59413S

# WAC LIGHTING

## Quill

### Square Multi Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59425S 16" - 25 Lights	2 700K/3000K/3500K/4000K 90	200 W	12983	AB Aged Brass BK Black CH Chrome

Example: **PD-59425S-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body



#### FINISHES:

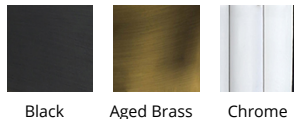

#### LINE DRAWING:

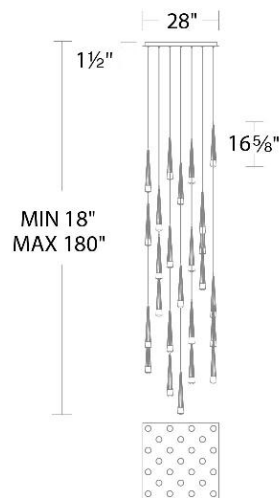

PD-594135

# WAC LIGHTING

## Quill

### Square Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-59441S 16" - 41 Lights	2 700K/3000K/3500K/4000K 90	328 W	21291	AB Aged Brass BK Black CH Chrome

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **PD-59441S-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

#### FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 25 & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body




#### FINISHES:

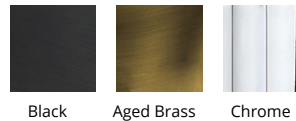

Black Aged Brass Chrome

#### LINE DRAWING:

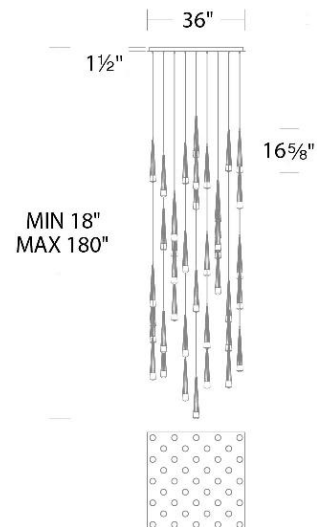

PD-59441S