


AETHER ATOMIC

R1ARDT, R1ARPT - Round Downlight and Pinhole Trim

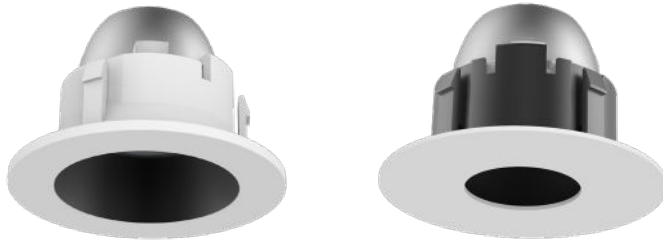

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Minuscule and mighty, peerless and powerful, the new potent Aether Atomic launches into the light. An engineering recessed marvel for next generation futurists. Sublime and serviceable, it's an icon for the ages. Atomic breaks the mold with robust illumination from a diminutive aperture, for a clean, quiet ceiling.

FEATURES

- Robust lumen output from 1" or 1/2" aperture
- Low glare for good visual comfort
- Field changeable beam angle with reflectors provided
- Low profile housing for installation in shallow plenums
- 5 year warranty

SPECIFICATIONS

Construction:	Injection molded polycarbonate low glare trim
Dimming:	100% - 1% ELV, TRIAC and 0-10V
Input Power:	11W
Light Source:	High output COB LED rated life of 50,000 hours
Finish:	Black, Black/White, Gold/White, Haze/White, White
Standards:	ETL & cETL Wet location listed, IC rated Airtight Title 24 JA8 Compliant

Trims (Order Housing and Power Supply Separately)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
	R1ARDT Round Downlight Trim (N, F, W beam reflectors included)	N 26°	2700K	90	880	2755	BK BKWT GLWT HZWT WT Black Black/White Gold/White Haze/White White
			3000K		945	2960	
			3500K		1015	3170	
			4000K		1080	3375	
		F 36°	2700K	895	2300		
			3000K	960	2470		
W 55°	3500K	1025	2645				
	4000K	1095	2820				
	2700K	760	730				
	3000K	815	785				
N 26°	3500K	875	840				
	4000K	930	895				
	R1ARPT Round Pinhole Trim (N, F beam reflectors included)	N 26°	2700K	90	430	1715	BK WT Black White
			3000K		460	1845	
			3500K		495	1975	
			4000K		525	2105	
		F 32°	2700K	465	1490		
			3000K	500	1600		
3500K	535	1715					
	4000K	570	1825				

R1A ____ - ____

Example: R1ARDT-BKWT

Please see next page for housing and power supply units (required)

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761

R1ARDT, R1ARPT - Round Downlight and Pinhole Trim

Housing (Required) - Order separately from trims

	Model	Power	Color Temp	CRI
	R1ARNT Round Trim IC-Rated, Airtight	11W	927 2700K 930 3000K 935 3500K 940 4000K	90

R1ARNT-___

Example: **R1ARNT-927**

Remote Power Supply (Required) - Order separately from trims and housings

	Model	Input	Output	Dimmable	
	PS-0600A-UR1	120V - 277V	1 Channel UL Class 2	100%-1% ELV, TRIAC, 0-10V	8 3/4" x 2" x 1 3/8"
	PS-0600A-UR6	120V - 277V	6 Channels UL Class 2	100%-1% ELV, TRIAC, 0-10V	10 7/8" x 3 7/8" x 1 3/8"

Example: **PS-0600A-UR6**

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

Accessory (Sold Separately)

	Model	Description
	R1A-TOOL	Service tool for removing trim and light engine

Example: **R1A-TOOL**