


# AETHER ATOMIC



## R1ARNT, R1ASNT - Round and Square Trimmed Downlight Housing

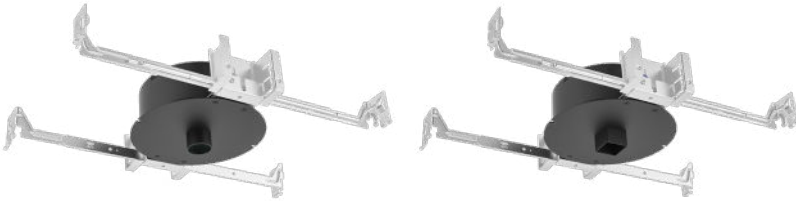

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Minuscule and mighty, peerless and powerful, the new potent Aether Atomic launches into the light. An engineering recessed marvel for next generation futurists. Sublime and serviceable, it's an icon for the ages. Atomic breaks the mold with robust illumination from a diminutive aperture, for a clean, quiet ceiling.

### FEATURES

- Low profile housing for installation in shallow plenums
- Suitable for drywall, grid or wood ceiling
- Accepts trimmed downlight, pinhole or wall wash trims
- Replaceable LED Light Engine
- 5 year warranty

### SPECIFICATIONS

<b>Construction:</b>	Durable die-cast aluminum housing
<b>Dimming:</b>	100% - 1% ELV, TRIAC and 0-10V
<b>Input Power:</b>	11W
<b>Light Source:</b>	High output COB LED rated life of 50,000 hours
<b>Mounting:</b>	Suitable for installations on grid, wood or drywall ceilings.
<b>Ceiling thickness:</b>	Drywall & Grid: 1/2" - 3/4" Wood: 1/2" - 2"
<b>Standards:</b>	ETL & cETL Wet location listed, IC rated Airtight Title 24 JA8 Compliant

Housings (Order Trim and Power Supply Separately)	Model	Power	Color Temp	CRI
	<b>R1ARNT</b> Round Trim IC-Rated, Airtight	11W	<b>927</b> 2700K <b>930</b> 3000K <b>935</b> 3500K <b>940</b> 4000K	90
	<b>R1ASNT</b> Square Trim IC-Rated, Airtight	11W	<b>927</b> 2700K <b>930</b> 3000K <b>935</b> 3500K <b>940</b> 4000K	90

### R1A\_\_\_ - \_\_\_



Example: **R1ARNT-927**

Please see next page for power supply units (required)

<b>wacighting.com</b>	<b>Headquarters, East Manufacturing Facility</b>	<b>South East Manufacturing Facility</b>	<b>Central Manufacturing Facility</b>	<b>West Manufacturing Facility</b>
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

## R1ARNT, R1ASNT - Round and Square Trimmed Downlight Housing

Remote Power Supply (Required) -  
Order separately from trims and housings

	Model	Input	Output	Dimmable	
	<b>PS-0600A-UR1</b>	120V - 277V	1 Channel UL Class 2	100%-1% ELV, TRIAC, 0-10V	8 3/4" x 2" x 1 3/8"
	<b>PS-0600A-UR6</b>	120V - 277V	6 Channels UL Class 2	100%-1% ELV, TRIAC, 0-10V	10 7/8" x 3 7/8" x 1 3/8"

Example: **PS-0600A-UR6**

Home-run wiring. Recommended maximum distance between power supply and compatible light fixture is shown in below table:

	18 AWG	16 AWG	14 AWG	12 AWG
Maximum distance between power supply and light fixture	100 ft	150 ft	200 ft	250 ft

Accessory (Sold Separately)

	Model	Description
	<b>R1A-TOOL</b>	Service tool for removing trim and light engine

Example: **R1A-TOOL**

Replacement Light Engine

**RPL-R1A-MOD-927**  
**RPL-R1A-MOD-930**  
**RPL-R1A-MOD-935**  
**RPL-R1A-MOD-940**

Example: **RPL-R1A-MOD-930**