

WAC LIGHTING

Swerve

Chandelier 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-67426 26"	2700K	BK Black	20 W	2100	1260
	3000K		20 W	2100	1260
	3500K		20 W	2100	1260
	4000K		20 W	2100	1260

Example: **PD-67426-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Fluid circles of black and light twist within each other, casting diffused LED illumination in all directions.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on slope ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	3500K,2700K,3000K,4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




FINISHES:



Black

LINE DRAWING:

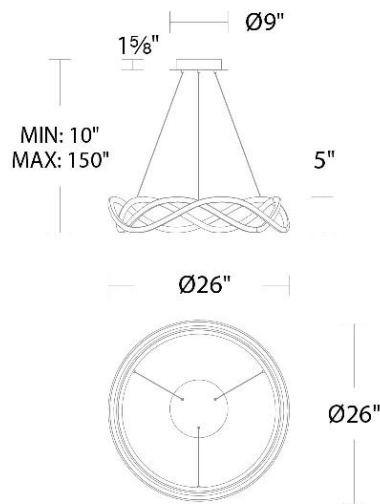

PD-67426