

WAC LIGHTING

Viggo

Mini Pendant 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-69424 24"	2700K	BK Black	8 W	655	291
	3000K		8 W	655	291
	3500K		8 W	655	291
	4000K		8 W	655	291

Example: **PD-69424-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.1"

SPECIFICATIONS

Color Temp:	4000K,3500K,2700K,3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser




FINISHES:



Black

LINE DRAWING:

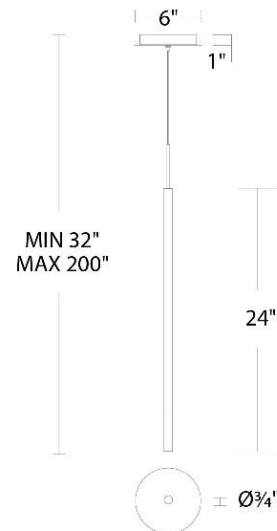

PD-69424

WAC LIGHTING

Viggo

Mini Pendant 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-69432 32"	2700K	BK Black	8 W	655	291
	3000K		8 W	655	291
	3500K		8 W	655	291
	4000K		8 W	655	291

Example: **PD-69432-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Spin-on round canopy with minimal hardware
- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.1"

SPECIFICATIONS

Color Temp:	3500K,4000K,2700K,3000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser




FINISHES:



Black

LINE DRAWING:

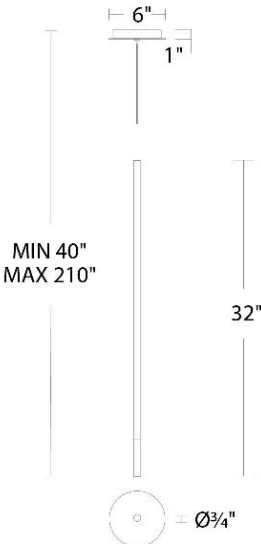

PD-69432