

WAC LIGHTING

Whirl

Round Multi Light 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|-------------------------|--------------------------------|------|--------|----------|
| PD-19403R 8" - 3 Lights | 2 700K/3000K/3500K/4000K 90 | 63 W | 2897 | BK Black |

Example: **PD-19403R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|-------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120/277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Aluminum body with silicon diffuser |




FINISHES:



Black

LINE DRAWING:

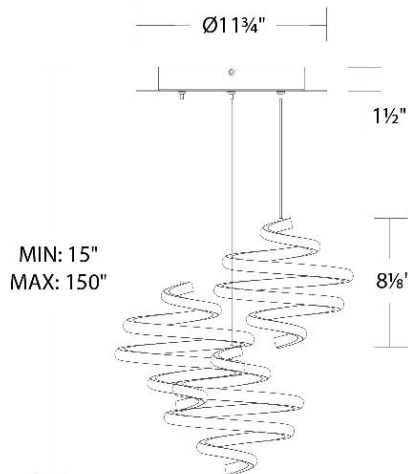

PD-19403R

WAC LIGHTING

Whirl

Round Multi Light 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|-------------------------|--------------------------------|-------|--------|----------|
| PD-19405R 8" - 5 Lights | 2 700K/3000K/3500K/4000K 90 | 101 W | 4621 | BK Black |

Example: **PD-19405R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION


Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|-------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120/277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Aluminum body with silicon diffuser |

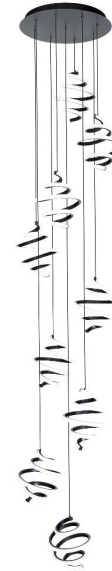


FINISHES:



Black

LINE DRAWING:

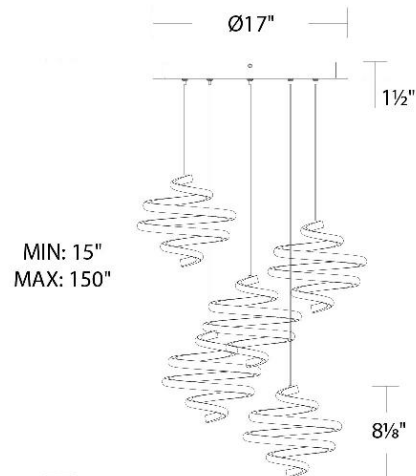

PD-19405R

WAC LIGHTING

Whirl

Round Multi Light 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|-------------------------|--------------------------------|-------|--------|----------|
| PD-19409R 8" - 9 Lights | 2 700K/3000K/3500K/4000K 90 | 187 W | 8318 | BK Black |

Example: **PD-19409R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|-------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120/277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Aluminum body with silicon diffuser |




FINISHES:



Black

LINE DRAWING:

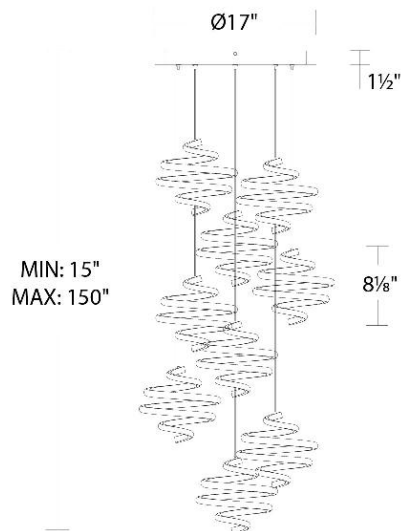

PD-19409R

WAC LIGHTING

Whirl

Round Multi Light 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|--------------------------|--------------------------------|-------|--------|----------|
| PD-19415R 8" - 15 Lights | 2 700K/3000K/3500K/4000K 90 | 315 W | 13556 | BK Black |

Example: **PD-19415R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|-------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120/277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Aluminum body with silicon diffuser |




FINISHES:



Black

LINE DRAWING:

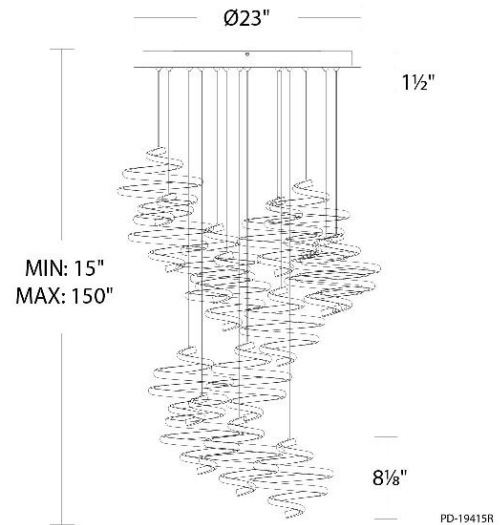

WAC LIGHTING

Whirl

Round Multi Light 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|--------------------------|--------------------------------|-------|--------|----------|
| PD-19421R 8" - 21 Lights | 2 700K/3000K/3500K/4000K 90 | 439 W | 18142 | BK Black |

Example: **PD-19421R-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|-------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120/277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Aluminum body with silicon diffuser |



FINISHES:



Black

LINE DRAWING:

