## DESCRIPTION


Square profile linear aluminum with rectangular wall mount. Inset opal polymeric diffuser. Finely textured plate or powder-coated finish. Wall emitting light with rotational adjustment.

5/8



## SPECIFICATION DETAILS

Fixture Dimensions	W4-5/8" x H28" x E3-7/8"
Light Source	LED with DC Driver
Wattage	20W
Total Lumens	1440lm
Delivered Lumens	BK-400lm*; BN-705lm*; WH-867lm;
Voltage	120V
Color Temperature	3000К
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, TRIAC or ELV Dimmer (Not Included)
Diffuser Details	White Acrylic Diffuser
ADA Compliant	Yes
Location	Dry
Illumination Direction	Fontlight Illumination
Mounting Style	All Orientation; Wall;
Energy Star Certified	Energy Star Compliant - BK, BN, WH
Canopy Dimensions	W4-5/8" x H5-3/8" x E3/8"
CEC Title 24 JA8	Yes, JA8-2022
Paint Finish	BG01; BK02; BN02; WH02;

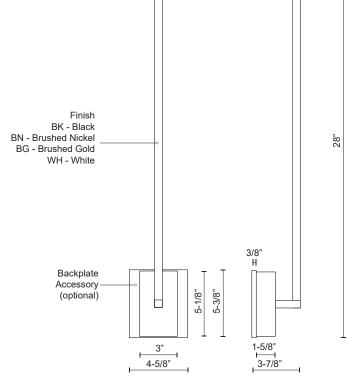

\* For custom options, consult factory for details.

\* For warranty information, please visit www.kuzcolighting.com/warranty

## KUZCO

CANADA: 19054 28TH AVENUE - SURREY, BC V3Z 6M3 USA: 3035 E. LONE MOUNTAIN ROAD - LAS VEGAS, NV 89081

WWW.KUZCOLIGHTING.COM © 2019 KUZCO LIGHTING. ALL RIGHTS RESERVED.

## c (Constant) Intertek

