

Junction Box

For PLS and PLP series Panel Lights

Provides an Extra 25.5 in³ of Volume for Wiring

8 Additional Knockout Locations for Line or Low Voltage




0-10V Dimming Leads on Both Sides

Junction Box is Required for the Installation of the Emergency Driver (BLD-YT08D) on PLP and PLS Panels

NOTE: The PLS-JB has been tested and approved by cETL for use with CSC LED PLS and PLP series back lit flat panels and can ONLY be used with these products to meet the Listing requirements.

DIMENSIONAL DRAWING (IN)

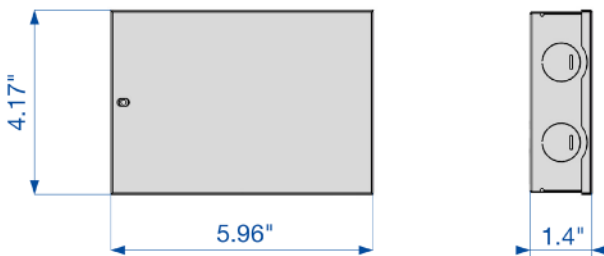

Pictured: PLS-JB installed on PLS22-40W-3P-40K-LV