

Rotatable Wall Packs

60W | Colour Tunable | 120-277V



Use as an uplight, downlight, or flood light
Ideal for security lighting, wall washing, flood lighting, and more

270° Rotatable Modules



Colour Tunable via DIP Switch
(3000K / 4000K / 5000K)

Oversized Heat Sink
for superior thermal management

Powder Coated Finish
(Black)

Die-cast Aluminum
Construction

0-10V Dimmable
with 4kV surge protection

Generously Sized Driver Box
with multiple entry points on side
and rear. Fits standard junction box



TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	7,270.1 lm @ 3000K
Efficacy	126.02 lm/W
CCT	3000K / 4000K / 5000K
CRI	>70
Beam Angle	60°
L70 Life	>54,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS


cUL	E482965
DLC Premium	PLZE6LE4CKA4

ILLUMINANCE AT A DISTANCE

Distance	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	22.1 fc	19.9 ft 20.4 ft
34.0ft	5.52 fc	39.8 ft 40.7 ft
51.0ft	2.45 fc	59.6 ft 61.1 ft
68.0ft	1.38 fc	79.5 ft 81.4 ft
85.0ft	0.88 fc	99.4 ft 101.8 ft
102.0ft	0.61 fc	119.3 ft 122.2 ft

■ Vert. Spread: 60.6°
■ Horiz. Spread: 61.8°

ISOCANDELA PLOT

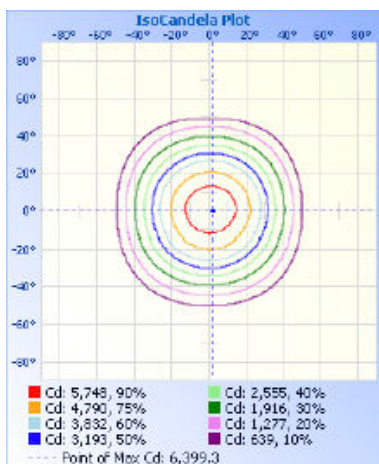


ELECTRICAL

Wattage	60W
Voltage	120-277V
Power Factor	>0.9
THD	<15%
Operating temp	-40 to 45°C

CONSTRUCTION

Housing	Die-cast Aluminum
Finish	Powder Coat
Finish Colour	Black
IP Rating	IP65
Gross Weight	3.05 kg
Carton Qty	2
Carton Dimensions	41.5 x 31 x 32 cm

DIMENSIONS (MM)

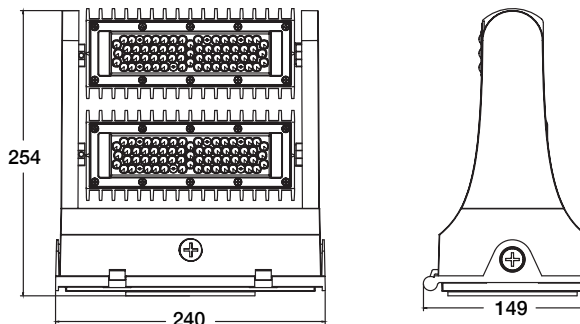

* All specs were tested while the fixture pointed straight down.

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com