

Volumetric Troffer

Wattage Selectable | Colour Tunable | 120-347V

Ideal for commercial lighting areas such as offices, retail spaces, hallways, healthcare applications, and more



Optional Accesories (sold separately):
Emergency LED Driver



BLD-YT08D

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	4,593 lms @ 3000K
Efficacy	122 lm/W
CCT	3000K / 3500K / 4000K
CRI	86
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

cETL	5000444
DLC Premium	S-PYCOWM

ILLUMINANCE AT A DISTANCE

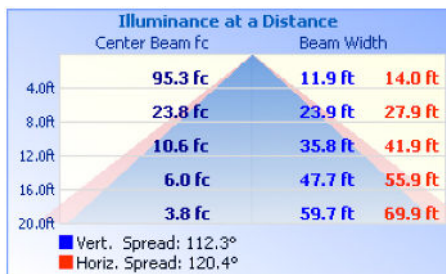

ISOCANDELA PLOT

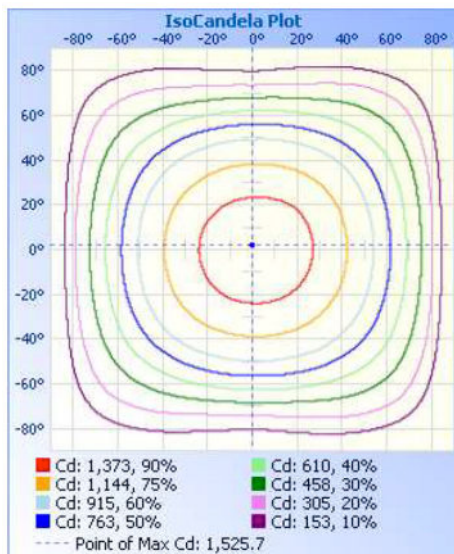

ELECTRICAL

Wattage	30W/35W/40W
Voltage	120-347V
Power Factor	0.91
THD	20.2%
Operating Temp	-20 to 40°C


CONSTRUCTION

Housing	Metal
Cover	Polycarbonate
Finish	White
IP Rating	IP20
Net Weight	9.6 kg
Gross Weight	11.5 kg
Carton Qty	2
Carton Dimensions	1257 x 140 x 653 mm

ACCESSORIES (Ordered Separately)

Emergency LED Driver	BLD-YT08D
----------------------	-----------

DIMENSIONS

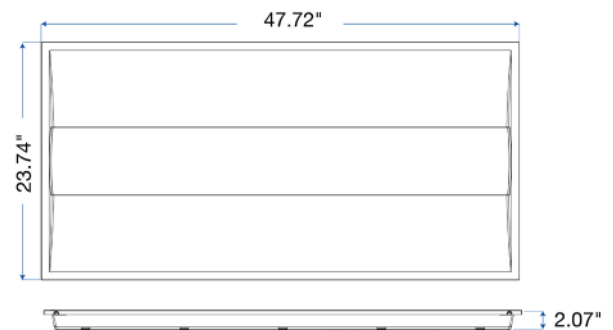

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833