

# WPX Wall Pack

30W | Colour Tunable | 120-347V



The most versatile architectural wall pack in Canada  
Ideal for outdoor wall-mount applications such as commercial,  
industrial, retail, or hospitality buildings

Type 3 Distribution Optics  
Type 2 and Type 4 options available

Durable Die-Cast  
Aluminum Housing

1/2" NPT Entry  
on all sides



Approved by International  
Dark Sky Association  
when set for 3000K operation

120-347V Driver  
with 6kV  
surge protection

Colour Tunable

3000K/4000K/5000K

Optional Accesories (sold separately):  
Visor, Type 2 Optics, Type 4 Optics



WPX-VISOR-S



WPX-T2S



WPX-T4S

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

Lumens	3,764 lm
Efficacy	122 lm/W
CCT	3000K / 4000K / 5000K
CRI	73
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


### APPROVALS AND LISTINGS

cETL	5018387
DLC	PLYPS6YKR048

### ILLUMINANCE AT A DISTANCE

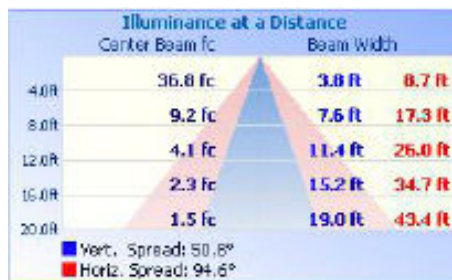

### ISOCANDELA PLOT

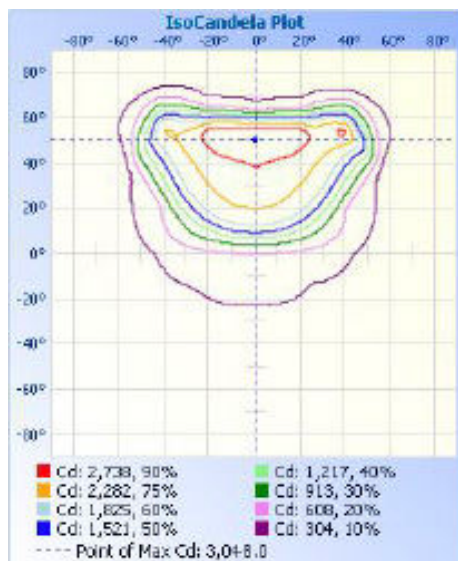

### ELECTRICAL

Wattage	30W
Voltage	120-347V
Power Factor	0.9
THD	14%
Operating Temp	-30 to 45°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Black
IP Rating	IP65
Net Weight	1.6 kg
Gross Weight	2.1 kg
Carton Qty	1
Carton Dimensions	200 x 260 x 275 mm

### ACCESSORIES (Ordered Separately)

Visor	WPX-VISOR-S
Type 2 Optics	WPX-T2S
Type 4 Optics	WPX-T4S

### DIMENSIONS

