

WPX Wall Pack

30W | Colour Selectable | 120-347V

The most versatile architectural wall pack in Canada
Ideal for outdoor wall-mount applications such as commercial,
industrial, retail, or hospitality buildings

Type 3 Distribution Optics Standard

Type 2 and Type 4 options available

1/2" NPT Entry
on all sides



Colour Selectable

3000K/4000K/5000K

120-347V Driver

with 6KV
surge protection

Durable Die-Cast
Aluminum Housing



3CCT



120-347V



eco

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	3,764 lm
Efficacy	122 lm/W
CCT	3000K / 4000K / 5000K
CRI	73
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


APPROVALS AND LISTINGS

cETL	5018387
------	---------

ACCESSORIES (Ordered Separately)

Visor	WPX-VISOR-S-WH
Type 2 Optics	WPX-T2S
Type 4 Optics	WPX-T4S

ILLUMINANCE AT A DISTANCE

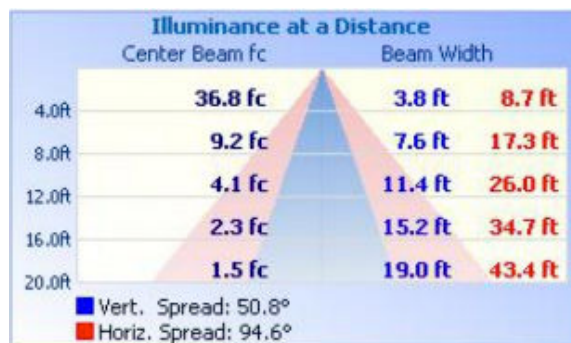

ELECTRICAL

Wattage	30W
Voltage	120-347V
Power Factor	0.9
Amperage	0.45A
THD	14%
Operating Temp	-30 to 45°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Powder Coat
Finish Colour	White
IP Rating	IP65

DIMENSIONS & WEIGHTS

Fixture Weight	2.1 lbs
Fixture Dimensions	9.8 x 8.7 x 6.7 in
Carton Qty	1
Carton Weight	2.1 lbs
Carton Dimensions	10.2 x 7.9 x 10.2 in

DIMENSIONS

