

# WPX Wall Pack

80W | Colour Selectable | 120-347V

The most versatile architectural wall pack in Canada  
Ideal for outdoor wall-mount applications such as commercial,  
industrial, retail, or hospitality buildings

Type 3 Distribution Optics Standard

Type 2 and Type 4 options available

1/2" NPT Entry  
on all sides



Colour Selectable  
3000K/4000K/5000K

120-347V Driver  
with 6KV  
surge protection

Durable Die-Cast  
Aluminum Housing



3CCT



120-347V



eco

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

Lumens	9,566 lm
Efficacy	121.8 lm/W
CCT	3000K / 4000K / 5000K
CRI	73
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


### APPROVALS AND LISTINGS

cETL	5018387
------	---------

### ACCESSORIES (Ordered Separately)

Visor	WPX-VISOR-L-WH
Type 2 Optics	WPX-T2L
Type 4 Optics	WPX-T4L

### ILLUMINANCE AT A DISTANCE

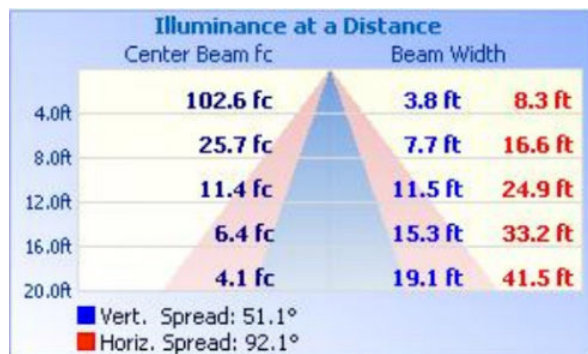

### ELECTRICAL

Wattage	80W
Voltage	120-347V
Power Factor	0.93
Current	1.05A
THD	12%
Operating Temp	-30 to 45°C


### CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Powder Coat
Finish Colour	White
IP Rating	IP65

### DIMENSIONS & WEIGHTS

Fixture Weight	6 lbs
Fixture Dimensions	11 x 9.2 x 7.2 in
Carton Qty	1
Carton Weight	6 lbs
Carton Dimensions	12.2 x 10.8 x 8.5 in

### DIMENSIONS

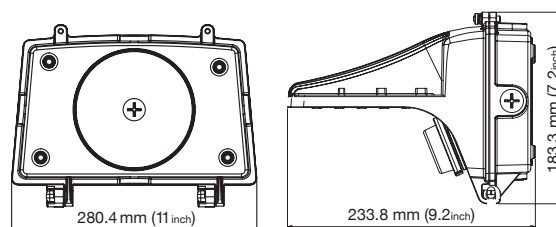

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833