

DATE: _____ LOCATION: _____

TYPE: _____ PROJECT: _____

CATALOG #: _____

JL-ALT8-8FTAB-M48W-CCT

8FT T8 LED TUBE LIGHT (TYPE B)

DESCRIPTION

T8 LED Tube | Type B | Double Ended | 24-48W | 3500K-6500K | 8FT



CONSTRUCTION

Plastic / Aluminum | 8' LED T8 Tubes | FA8 Base

ELECTRICAL

Bypass ballast runs on 120-277V line voltage.

INSTALLATION

Type B (Double-end Wiring).

APPLICATIONS

Office Buildings/Schools/Factories/Hospitals

Suitable for dry and damp indoor locations.

Working temperature -20°C to +55°C (-4°F to +131°F).

Storage Temperature -40°C to +60°C (-40°F to +140°F).

LISTING

ETL, DLC, FCC, RoHS, CE

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours.

FEATURES

Bulb Type	T8 LED
Base Type	FA8
Size	8FT
5Wattage Selectable	24W/30W/36W/42W/48W
5CCT Selectable	3500K/4000K/5000K/5700K/6500K
Efficiency	120lm/W
Input Voltage	120-277V AC
Frequency Range	50/60Hz
Ballast Compatibility	Type B
Wire Connection	Double-end Wiring
Cover	Frosted / Clear
CRI	>80
PF	>0.95
THD	<=20%
Beam Angle	120°
IP Rating	IP 20
Lifetime	50,000 hours




JL-ALT8-8FTAB-M48W-CCT

8FT T8 LED TUBE LIGHT (TYPE A+B)

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Dimensions
JL-ALT8-8FTB-M48W-CCT	8FT	24W, 30W, 36W, 42W, 48W	120-277V	2880lm, 3600lm, 4320lm, 5040lm, 5760lm	120 lm/W	3500K, 4000K, 5000K, 5700K, 6500K	91.08"L x 1.32"W x 1.15"H


PHYSICAL SPECIFICATIONS

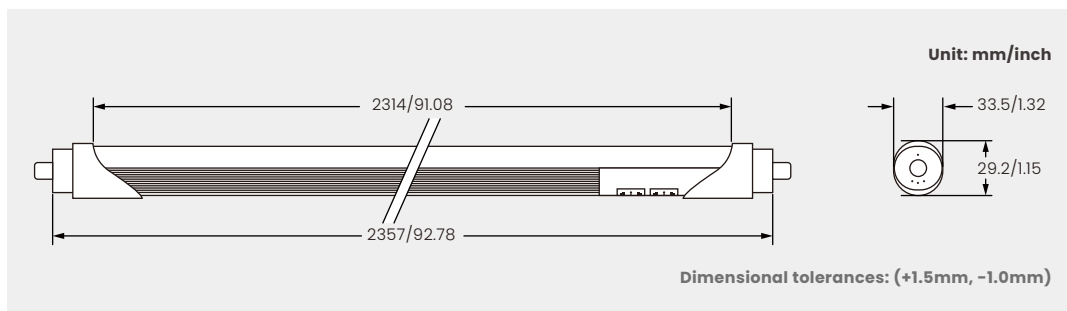

WEIGHT INFORMATION

1 Piece
1 lbs.

WATTAGE AND CCT SWITCHABLE

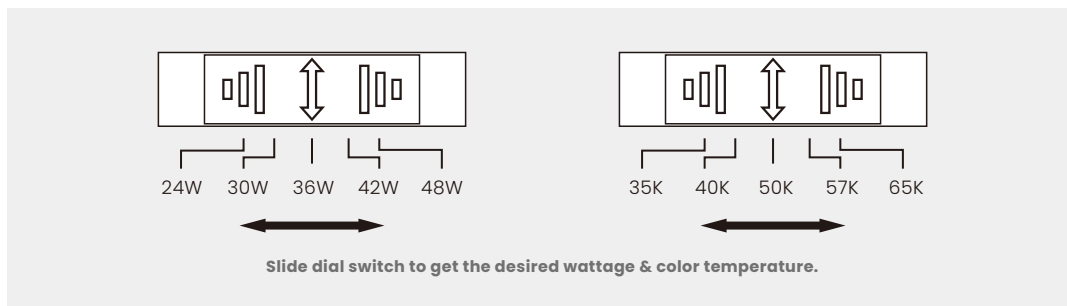

INSTALLATION INSTRUCTIONS

TYPE B INSTALLATION BY-PASS REPLACEMENT (WITHOUT BALLAST)

Connected to the power supply in double-ended mode.

