

DESCRIPTION

A flexible, low cost downlight solution for recessed can LED retrofit applications. It can be installed virtually anywhere, provides true color rendering with 80+ CRI, and can be continuously dimmed to 10% with standard dimmers. Ideal for healthcare, property management, hospitality, residential, office, retail, etc.




TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5 CCT	2700K 3000K 3500K 4000K 5000K
CRI	80
BEAM ANGLE	212.9°
LIFESPAN	≥50,000hours
DIMMING	Triac Dimming
RATING	Suitable for wet location
WORKING TEMP	-20°-40°C
FINISH	White/Black/Bronze
WARRANTY	5 years limited

Specification data

Model No.	Wattage (W)	Lumens (lm)	Beam Angle
WP810-CCT-80	12W	800LM	212.9°

CHANGE COLOR TEMPERATURE WITH THE SIMPLE FLIP OF A SWITCH

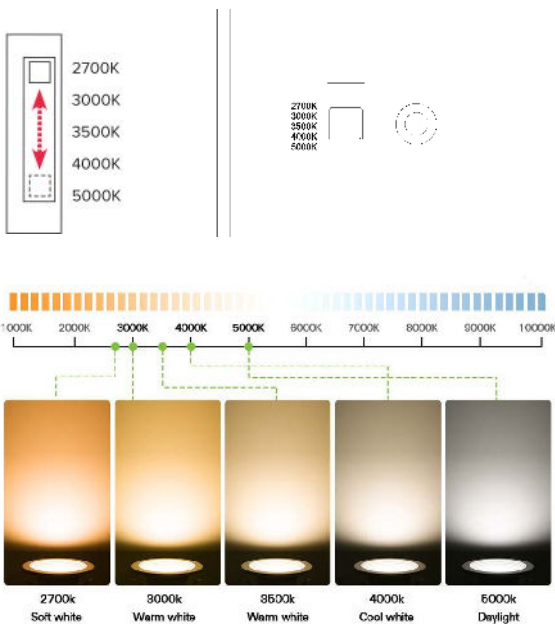

DIMMABLE

Compatible with most LED dimmers to give you a smooth, 100%-10% dimming experience, so you can choose the right brightness for you. Please check the dimmer list for compatible models of dimmers!

NO.	Lutron	NO.	Leviton
1	NI-1000	1	6674
2	S 603P	2	6633 P
3	S-600P	3	6683
4	CTCL-153P	4	6672
6	DVW 603PGH WH	5	IPL06
7	4X603	6	VP106
8	DVCL-153P-WH	7	DB33K1
9	CTCL 153PDH WH	8	1F4205
10	SLV-600P-WH	9	1A2305
12	DV-600P		
13	CT 603PGH WH		
16	MTR-600THW-WH		
17	MACL-153M-WH		
18	S 600PR WH		

LISTING

UL Listed. Energy Star.

