


PAR LED Lamps

HD-PAR/I90/5CCT

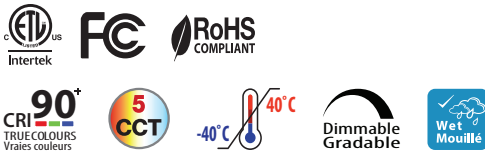

3-year limited warranty


Operating temperature range -40 °C ~ +40 °C



Features & Benefits

- cETLus listed
- 5CCT Selectable (27/30/35/40/50K)
- High CRI (90+), Dimmable
- Glass lens with perfect light distribution
- 25,000 hrs average life
- Wet location rated

Dimensional Drawing

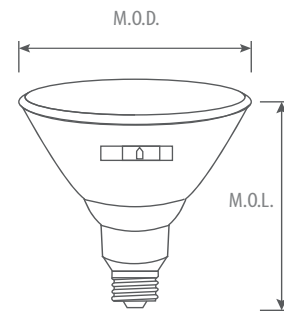

Ordering Information Example: HD-PAR30LN/I90/12W/5CCT/WFL40/D/BK

Family Name	Lamp Type	CRI	Wattage	CCT	Beam Angle	Dimmable	Finish
HD	PAR20 PAR30LN (PAR30 Long neck) PAR38	I90 (CRI 90+)	7W 12W 16W	5CCT (5CCT Selectable)	WFL40 (40°)	D (Dimmable)	BK (Black) Blank (White)

Product Specification

Ordering Code	Model Number	Wattage (W)	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens(lm)	CCT(K)	CRI	Enclosed Fixture Application	Wet Location	M.O.D. (inch)	M.O.L. (inch)	Case QTY.
1783001	HD-PAR38/I90/16W/5CCT/WFL40/D	16	E26	120	25,000	40°	1400	27/30/35/40/50	90	No	Yes	4.8	5.31	20
1783003	HD-PAR38/I90/16W/5CCT/WFL40/D/BK	16	E26	120	25,000	40°	1400	27/30/35/40/50	90	No	Yes	4.8	5.31	20
1782004	HD-PAR30LN/I90/12W/5CCT/WFL40/D	12	E26	120	25,000	40°	840	27/30/35/40/50	90	No	Yes	3.74	4.84	30
1782006	HD-PAR30LN/I90/12W/5CCT/WFL40/D/BK	12	E26	120	25,000	40°	840	27/30/35/40/50	90	No	Yes	3.74	4.84	30
1781001	HD-PAR20/I90/7W/5CCT/WFL40/D	7	E26	120	25,000	40°	500	27/30/35/40/50	90	No	Yes	2.47	3.46	50
1781003	HD-PAR20/I90/7W/5CCT/WFL40/D/BK	7	E26	120	25,000	40°	500	27/30/35/40/50	90	No	Yes	2.47	3.46	50