
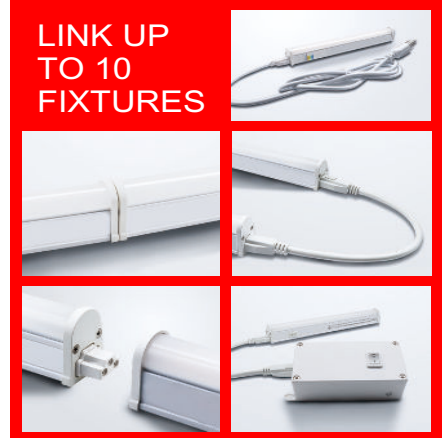


T5 LED Bar 5CCT

No shadow linking connector

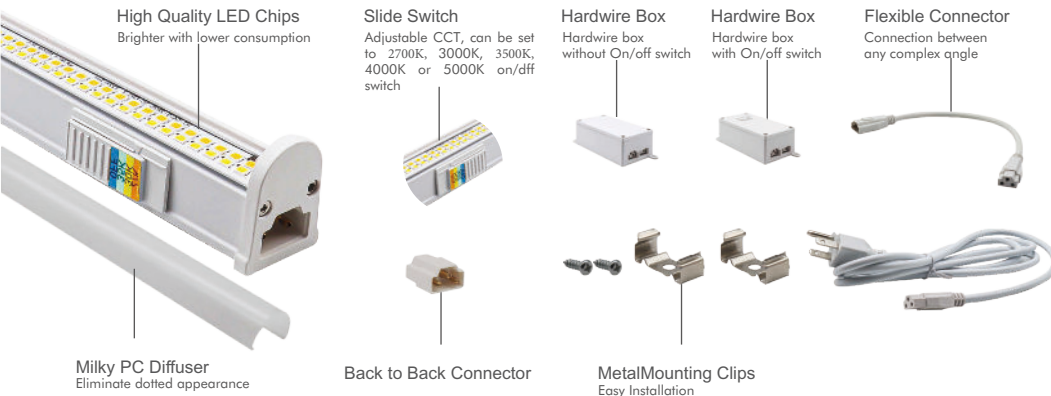


Features

- Ultra slim body and frosted milky PC diffuser, easy to hide
- Made of durable extruded aluminum frame with frosted milky PC lens No shadow linking connector
- Input voltage: AC 120V 50/60Hz
- Dimmable with Triac, ELV and incandescent dimmers
- Link up to 10 fixtures
- Easy installation: metal mounting clips with two screws
- Color rendering index: 80Ra+ or 90Ra+
- 6 lengths to choose from 9"
- Powered by LED integrated strip that maintains uniform intensity with 70% lumens at 50,000 hours average life
- Beam angle: 160°
- 5- color selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K



	Ordering&Specification					
Model	AD113-9	AD113-11	AD113-24	AD113-36	AD113-48	AD113-58
Length	(229mm)	(278.5mm)	(610mm)	(914mm)	(1219mm)	(1475mm)
Watts	4W	5W	9W	14W	18W	22W
Lumen	320lm	380lm	760lm	1050lm	1400lm	1800lm
ColorTemperature	Field selectable 3CCT(2700K/3000K/3500K/4000K /5000K)					
CRI	90Ra+ (80Ra Optional)					
Input	AC120V,60Hz					
Dimming	TriacDimming					
Power Factor	>0.9					
Approved Location	Damp Location					
Operating Temp.	(-4 °F~104 °F)-20~40 °C					
Beam Angel	160°					


DIMENSION




LENGTH

L : 9"(229mm)/11"(278.5mm)/23"(610mm)/34"(914mm)/46"(1219mm)/58"(1475mm)

Power Cord Installation

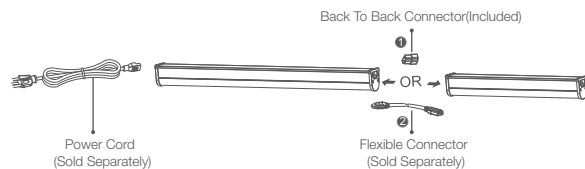

Hardwire Box Installation

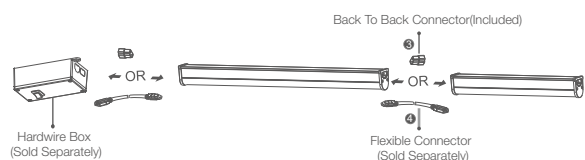

PACKAGE						
Sizes	9	11	24	36	48	58
Weight.(g)	530g	560g	390g	520g	660g	820g
Qty/CTN (pcs)	50pcs/CTN	50pcs/CTN	20pcs/CTN	20pcs/CTN	20pcs/CTN	20pcs/CTN
Box Dimension	290*380*170mm	341*380*170mm	675*200*138mm	970*200*138mm	1300*200*138mm	1530*200*138mm
Gross Weight	6.6kg/CTN	7.6kg/CTN	5.0kg/CTN	6.9kg/CTN	8.9kg/CTN	11kg/CTN

Notes:
* XX represents different CCT, 27 for 2700K; 3 for 3000K; 35 for 3500K; 4 for 4000K; 5 for 5000K, 3CCT
* YY represents different color finish, WH for white; BN for brushed nickel; BK for Black; BZ for Bronze.
Example: AD113-9-3CCTWH

ACCESSORIES

