
dals

MODEL CFLEDR18-CC-V NAME

Delta

18" Round Flush Mount

Our LED flush mounts incorporate Edge-Lit technology, eliminating hot spots or glare. Can be installed inside or outside and offer 5 switch-selectable CCT settings – 2700 K, 3000 K, 3500 K, 4000 K, and 5000 K.

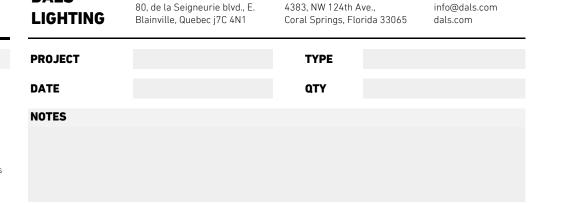

U.S.A.

4383, NW 124th Ave.,


877.430.1818

info@dals.com



1" Ø18"

LIGHT DISTRIBUTION



*Lumen output measured at 3000k

QUICK SPECS

DALS

Canada

Wet - Covered ceiling 18" Environment Size mounted only Watts (W) Location 30 Indoor / Outdoor **Delivered lumens*** 2400 Operating temp. (° C) -20 to 40 CRI 90 **IP** rating IP44 Voltage (v) 120/277/347 Input voltage (V) 120-347 Beam angle (deg) 110 Output voltage (V) -**Output current (mA)** Twist bracket Mounting _ Lifespan (hrs) 50 000 **Power factor** 90 Binning 3 SDCM **Driver type** Driver on board LED model SMD 2835 THD <30% Certifications Light direction Bas ETL, FCC, ICES, 2700K,3000K,3500K,4000K,5000K T24/JA8, ADA **Color temperature**

ORDERING GUIDE CFLEDR18-CC-V Finish WH - White **BK** - Black

CONSTRUCTION

ELECTRICAL DETAILS

Lens material	PC
Lens type	Frosted
Finish type	Painted
Housing material	Aluminum

WHAT'S IN THE BOX	ACCESSORIES	ADAPTORS
LED flush mount fixture		
Mounting bracket		
Mounting hardware		
Wire nuts		
Instruction sheet		

RECOMMENDED DIMMER LIST*

BRAND	MODEL	DIMMER SPECS	GRADE	MIN	MAX	MAX LOAD
Lutron	DVSTV (0-10 V Controls)*	960W, 8A, 120-277 V	Compatible	2	95	31
Leviton	IP710-LFZ (0–10 V Controls)	1200VA, 10A LED, 120-277V	Compatible	0	100	38
Leviton	ZS057-30Z (0-10 V Controls)	1388VA, 347VAC / 4A	Compatible	0	100	25

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

