

Assembly Instruction Sheet #IS-1703P32-45-101

For Style 1703P32-45-101

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.


Light Source: (45) 120V LED 90W DIMMABLE (3000K)

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

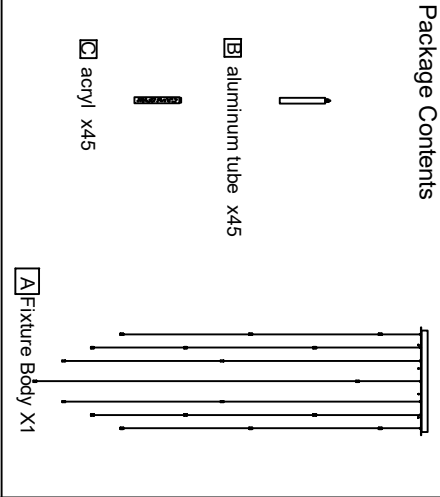


aluminum tube x45

acryl x45

Fixture Body X1

STEP 1 - Release Crossbar from Ceiling Canopy .

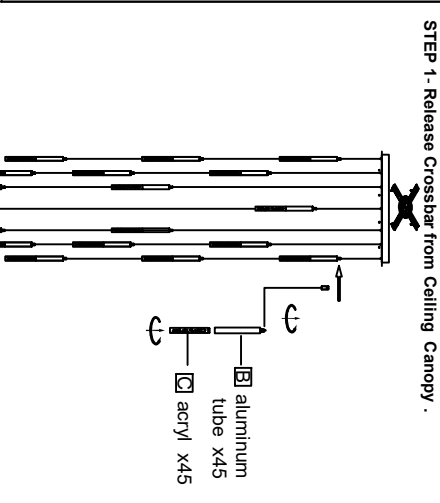


aluminum tube x45


acryl x45

Figure 1

Hardware Contents		
PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
CC	Outlet Box Screw	2pcs



STEP 2 - Attach Crossbar to Outlet Box

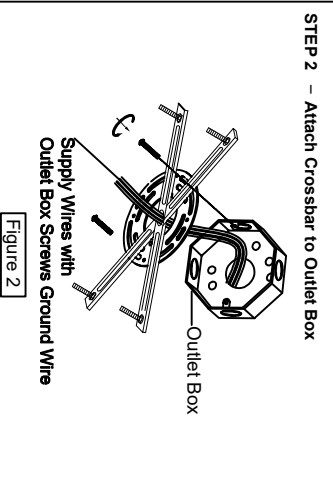

Supply Wires with Outlet Box Screws Ground Wire


Outlet Box

Figure 2


STEP 3 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.


White wire from outlet box




White wire from fixture




Black wire from outlet box (or Red)




Black wire from fixture




Bare, or Green Ground wire from outlet box




Ground wire from fixture



Bare, or Green Ground wire from outlet box



Ground wire from fixture



Green Ground Screw on the Crossbar





Figure 3


STEP 4 - Install Ceiling Canopy to Ceiling

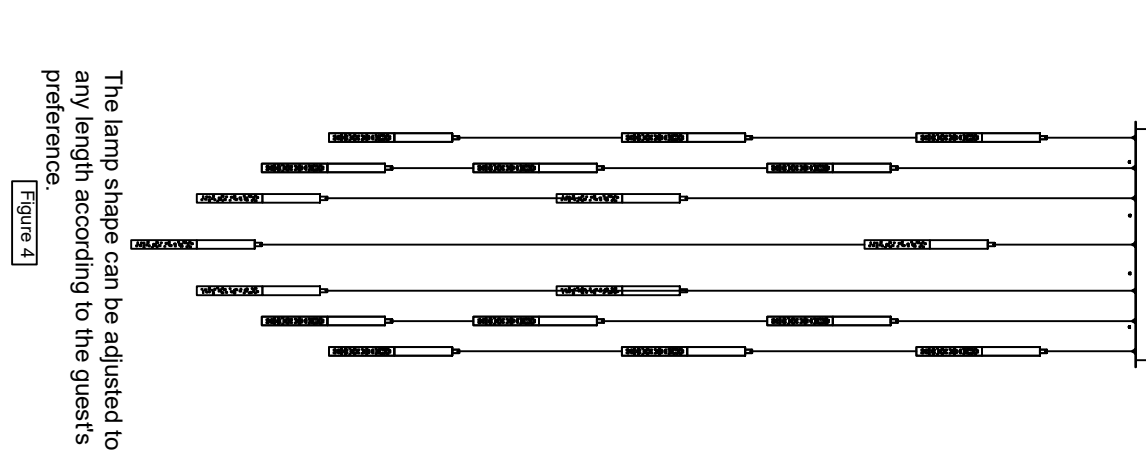

The lamp shape can be adjusted to any length according to the guest's preference.

Figure 4

STEP 5 – Detailed installation diagram

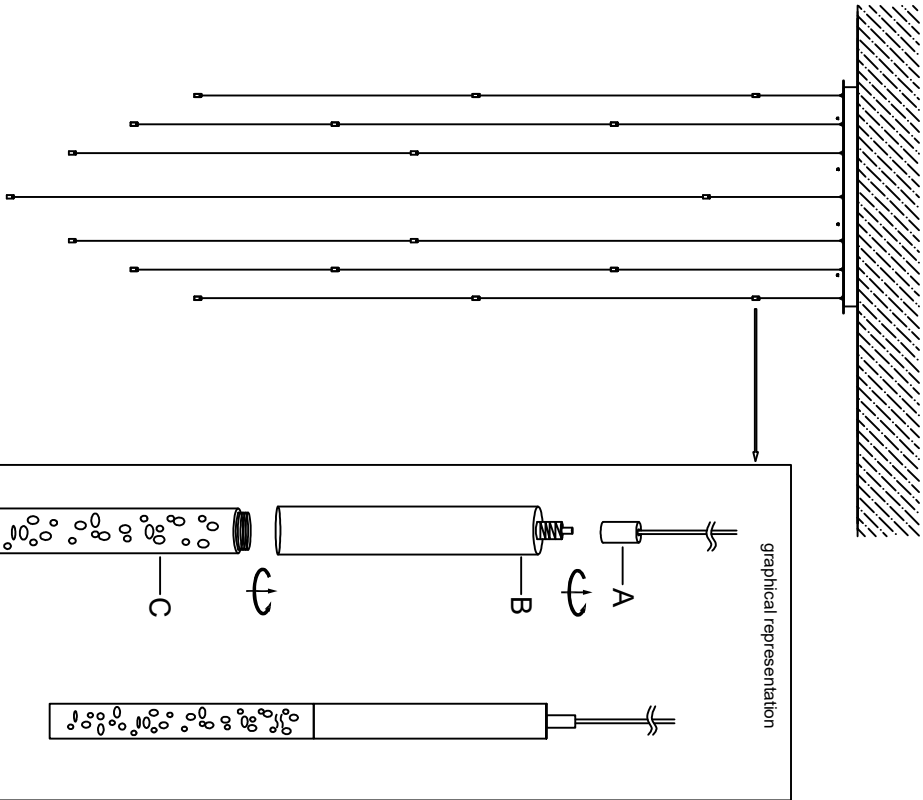

parts list





Figure 5

STEP 6 – Wire sequence and wire length

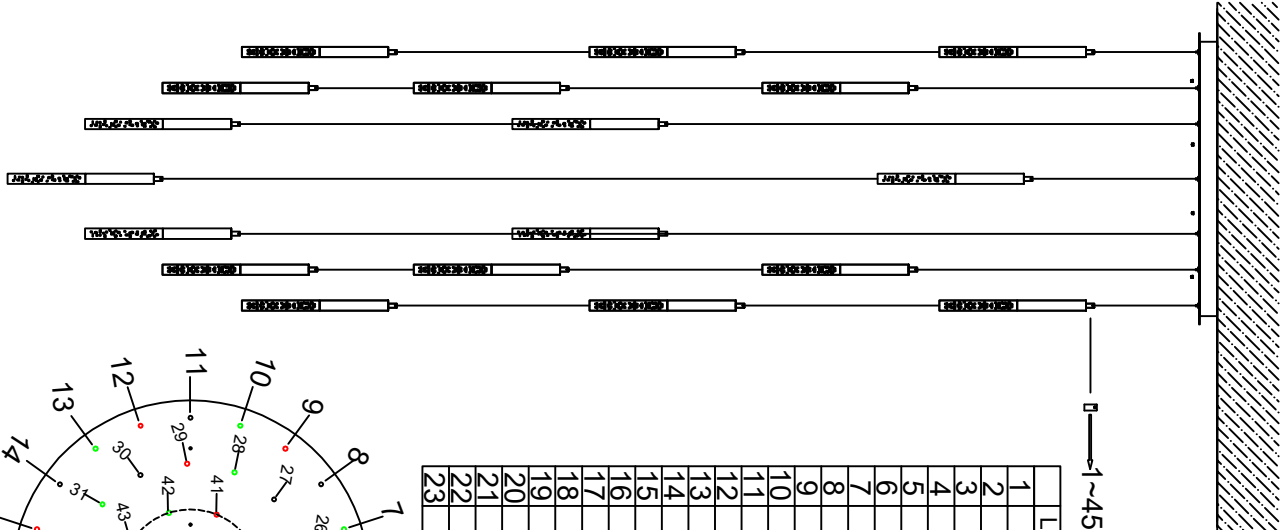

	Length	Length
1	12"	24
2	52"	25
3	96"	26
4	12"	27
5	52"	28
6	96"	29
7	12"	30
8	52"	31
9	96"	32
10	12"	33
11	52"	34
12	96"	35
13	12"	36
14	52"	37
15	96"	38
16	52"	39
17	96"	40
18	12"	41
19	52"	42
20	96"	43
21	72"	44
22	32"	45
23	104"	

Figure 6

